

Cable plug assembly, coaxial

SE-RG59-75TNCMG070

Item SE-RG59-0002





GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

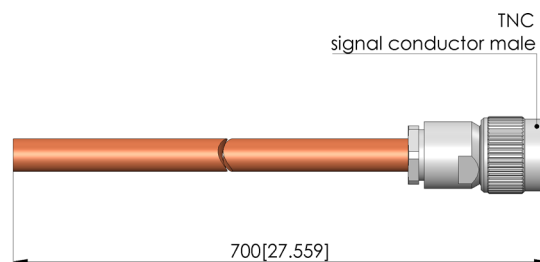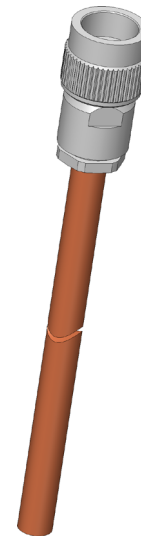

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-RG59
SE-RG59 plug
-25 °C [-13 °F]
85 °C [185 °F]
Yes

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength:
Attenuation coefficient a:
Attenuation coefficient b:

1 GHz
75 Ohm
Simple
101 W
101 RG59
1.5 kV
0,31730 RG59
0,04990 RG59

Cable data

Cable length:
Cable type:
Kink protection cable:
Attenuation Fmax:

700 mm [27.5 in]

Shrink-on sleeve, black, 20 mm
.26 dB

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:
Moment interface 1:

TNC
M signal conductor male / plug
Straight
Open cable end
65 cNm [5.75 lbf·in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE