

Test plug


PS-RJ10-004-F7,6

Item 17824



ingun[®]
Partner for Future Technology

- Compatible test plug mount 115788, 115790, 115792, 115794
- Precise, low-wear contacting of RJ plug connectors
- Outstanding service life: up to 250,000 cycles under optimal conditions.
- Reliable data transmission
- Installation via optional floating mount
- Signal transmission via original connector plug

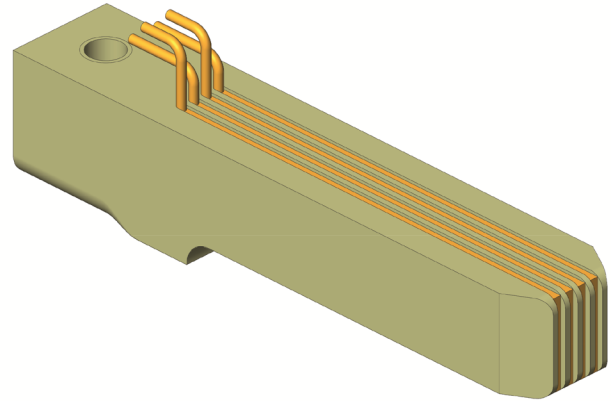

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-RJ
Grid:	14.5 mm [570 mil]
DUT / contact:	RJ-10
DUT interface gender :	F signal conductor female / socket
KS sub-series:	PSA-F7,6
Width:	7.6 mm [.299 in]
Height:	8.4 mm [.33 in]
Min. temperature:	-80 °C [-112 °F]
Max. temperature:	150 °C [302 °F]
RoHS-compliant:	Yes

Inner conductor data

Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	4

Electrical data

Impedance:	100 Ohm
------------	---------

Mechanical data

Total length:	42 mm [1.65 in]
Barrel diameter:	7.6 mm [.299 in]

Test plug


PS-RJ10-004-F7,6

Item 17824



ingun[®]

Partner for Future Technology

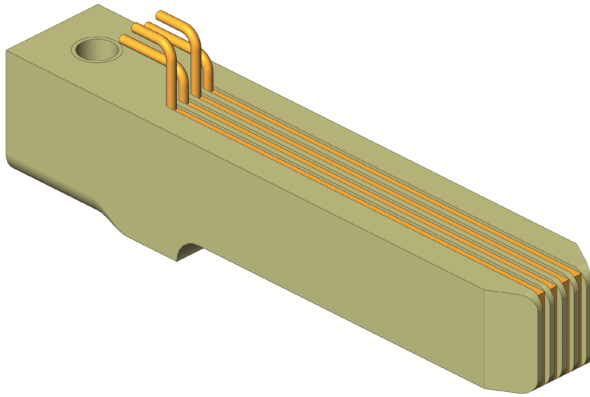

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes

