Signal line strand

SLL-CK-2.0-AWG26-GE-700

Item 116054







- Stranded wire with crimp connection for 12-pole connector housing
- Consistently stable signal quality throughout
- Flexible stranded wire for the greatest possible freedom of movement
- Crimp connection with contact blade which ensures secure clamping with high retention force

Application

The stranded wire is used for low-wear, quick-connect mating of connector housings without tools.

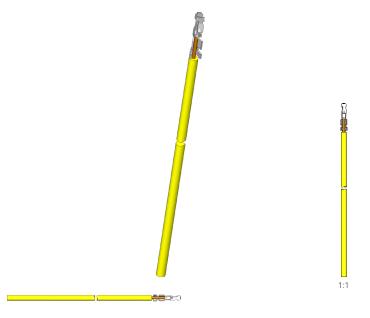





Product group: Series: Type: Version: Accessory type: Scope of delivery: Material:

Colour: Min. temperature: Max. temperature: RoHS-compliant: Electric accessory
SLL
Stranded wire
Crimp connection
Customising accessories
Pre-wired
Copper stranded wire, zinc plated
Yellow

Yellow -20 °C [-4 °F] 80 °C [176 °F] Yes **Electrical data**

Typical resistance (Ri) of one GKS:

Compatible with

Accessories: STV-BL12-F-C

7.5 [<u>.</u>295]

Technical data

Connection:
Force:
Max. current:
Max. voltage:
Installation grid:
Diameter:
Cable length:

Plug / solder /crimp connection 2 N [7.19 ozf] 3.6 A 250 V 2 mm [.078 in]

AWG26 mm 700 mm [27.5 in]

85 mOhm

Signal line strand SLL-CK-2.0-AWG26-GE-700

Item 116054







Accessories

Part no.	Designation	Version	Assembly
Connector housing			
116059	STV-BL12-F-C	1 row, 12 free slots, grid 2.00 mm	unloaded

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com





