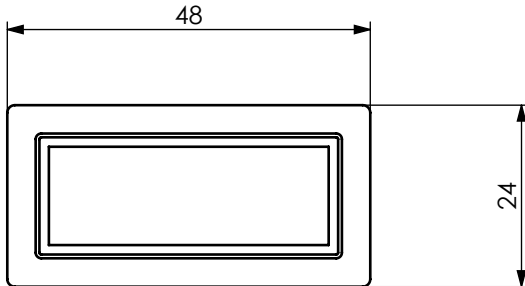

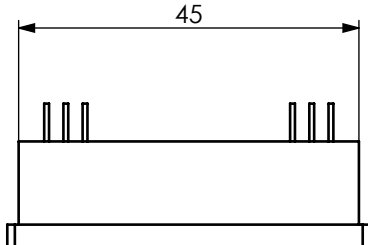
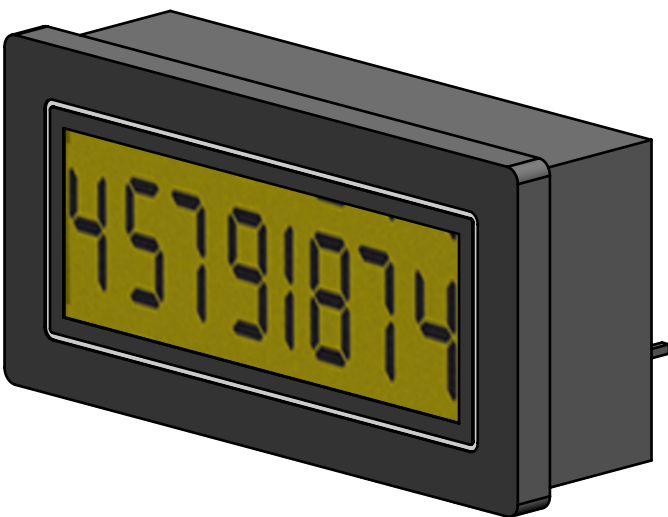


This technical document is the intellectual property of INGUN Prüfmittelbau GmbH. Without written contractual agreement, it is not permitted to duplicate, distribute, otherwise share this document with third parties without our explicit prior consent, or otherwise misuse it.

Diese technische Unterlage ist geistiges Eigentum der Fa. INGUN Prüfmittelbau GmbH. Sofern keine anderslautende schriftliche vertragliche Regelung besteht, darf sie ohne ausdrückliche vorherige Einwilligung weder vervielfältigt, noch verbreitet, noch dritten Personen in sonstiger Weise zugänglich gemacht werden, noch anderweitig missbraucht werden.

	1	2	3	4
A				
B				
C	8 digit, black LCD, 8mm characters Leading zeros blanking 0-999999999 • High speed input (pin3) 10kHz max negative edge triggered, 0.7V threshold 18V max, 50uS min pulse width • Contact closure open collector input (pin2). 20Hz max, negative edge triggered, 0.7V threshold 18V max, 15mS min pulse width 2.7 – 3.3V DC Up to 20Hz and 10kHz			
D	Supply voltage 3.0 VDC Count Speed Up to 18 Hz Current consumption Counter - <10µA, typically 5µA, backlight - 40mA max Operating Temperature -10°C to +50°C Storage Temperature -20°C to +70°C Certifications CE, RoHS			
E				
F	Maßstab/Scale  2:1 Gespeichert/Saved 12.03.2025 12:50:52 		Benennung/Designation EHZ-08-R-11-TR Elektrischer Hubzähler EHZ-08-R-11-TR Electric stroke counter Artikel Nr./Part no. 116613 Kundeninformation / Customer information	
			Index 0	Blatt/Sheet 1/1 DIN A4