

Interface

SST-88xx-M

Item 13879



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- TERADYNE (Spectrum) 88xx-M interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the bottom of the test fixture using a suitable interface frame.

Delivery

The interfaces are delivered fully loaded.

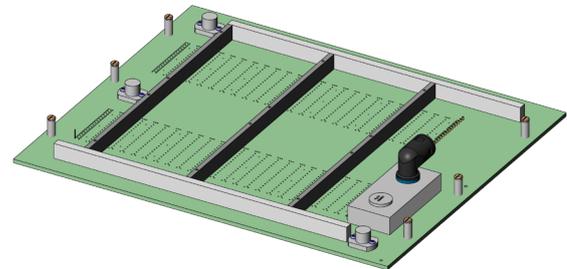

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Teradyne (Spectrum)
Version:	88xx-M
Accessory type:	Additional function
Scope of delivery:	Equipped, 3900 KT-158
Max. interface signals:	2560
Width:	417 mm [16.4 in]
Height:	69 mm [2.71 in]
Weight:	3.65 kg [8.04 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13
Vacuum test fixtures (VA):	VA 4060
Accessories:	SSA-88xx-M

Technical data

Length:	505 mm [19.8 in]
Outer dimensionS (WxDxH):	505 x 417 x 69 mm [19.8 x 16.4 x 2.71 in]

Interface supports

Part no.	Designation	Version
115272	SSA-88xx-M-MAxx13	Suitable to manual test fixtures MA xx13
113533	SSA-88xx-M-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB