

# Cable plug assembly, coaxial

## SE-RG316-50MCXMG150S


Item SE-RG316-0017



**ingun**<sup>®</sup>

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

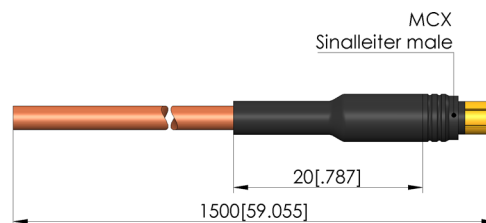

### General data

Product group:  
Series:  
Sub-series:  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

Assemblies  
SE-RG316  
SE-RG316 S plug MCX, insulated  
-55 °C [-67 °F]  
155 °C [311 °F]  
Yes

### Electrical data

Maximum frequency:  
Impedance:  
Cable shielding:  
Maximum performance:  
Performance coefficient:  
Dielectric strength:  
Attenuation coefficient a:  
Attenuation coefficient b:

3 GHz  
50 Ohm  
Simple  
78 W  
135 RG316  
.75 kV

### Cable data

Cable length:  
Cable type:  
Kink protection cable:  
Attenuation Fmax:

1,500 mm [59 in]  
Shrink-on sleeve, black, 20 mm  
2.44 dB

### Connector data

Interface 1:  
Interface gender 1:  
Version 1:  
Interface 2:

MCX  
M signal conductor male / plug  
Straight  
Open cable end

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Test probes



ingun.com

PLUG AND CABLE