




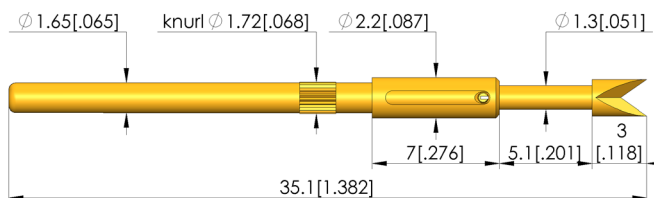

## Prüfung von Kabelschuhen

zur Überprüfung von Steckverbindern mit geometrisch eindeutig ausgerichteten Kontaktterminals



### General data

Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

Screw-in test probe  
Non-rotating test probes  
GKS-710  
2.54 mm [100 mil]  
Flat contact  
Yes  
Plug-in  
No  
No  
Yes  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

### Tip style data

Tip style:  
Tip diameter:  
Tip style surface:  
Tip style material:

22 crown, 2 points, self-cleaning  
2 mm [.078 in]  
A gold  
2 steel

### Electrical data

Current load capacity / rated current:  
Typical resistance (Ri):

5 A  
30 mOhm

### Mechanical data

Total length:  
Barrel diameter:  
Maximum stroke:  
Spring pre-load:  
Collar height:  
Spring force at working stroke:  
Recommended working stroke:

35.1 mm [1.38 in]  
1.65 mm [.064 in]  
5 mm [.196 in]  
1.77 N [6.36 ozf]  
07  
5 N [17.9 ozf]  
4 mm [.157 in]

# Test Probe


## GKS-710 222 200 A 5007

Item GKS-710-0053



**ingun**<sup>®</sup>

Partner for Future Technology

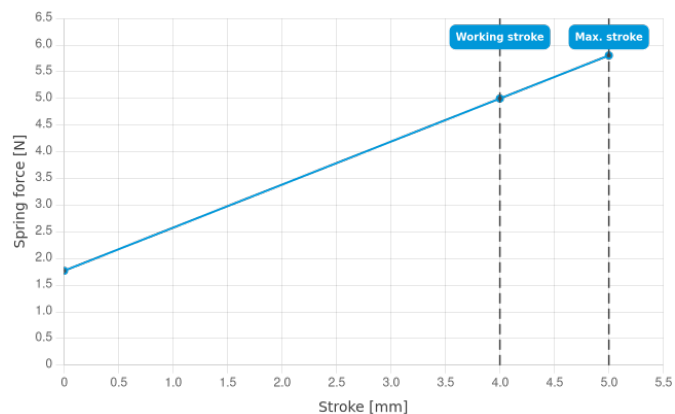

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com