

Pressure frame unit NDH-400-255-VL-ESD


Item 33884



GO TO PRODUCT

ingun[®]

Partner for Future Technology

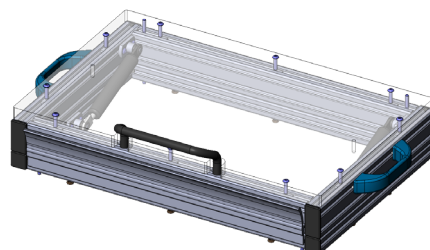

General data

Product group:

Series:

Type:

Version:

Accessory type:

Width:

Height:

Mounted units

NDH-VAxxxx

ESD

Locking strap

Additional function

452 mm [17.7 in]

100 mm [3.93 in]

Technical data

Pushrod length:

55.6 mm [2.18 in]

Free space above PCB:

54 mm [2.12 in]

Pressure frame opening angle:

85 °

Bearing distance:

310 x 215 x 60 mm [12.2 x 8.46 x 2.36 in]

Useable area (WxD):

320 x 175 mm [12.5 x 6.88 in]

Length:

288 mm [11.3 in]

Outer dimensionS (WxDxH): 452 x 288 x 100 mm [17.7 x 11.3 x 3.93 in]

Compatible with

Exchangeable kits version:

No limitations

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

