




GO TO PRODUCT



- Trusted pre-centring for positioning the PCB on the probe field
- HFS-802 H-MTD Kontaktstifte

Application

Pre-centring pins (VZ) are mounted onto the moving plate, and are used as insertion aids to pre-position DUTs simply and quickly on the probe field.

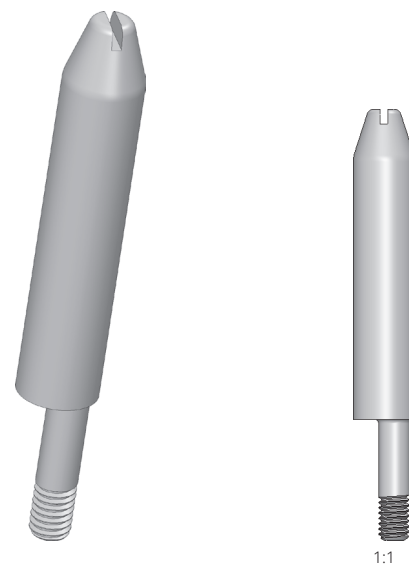

1:1

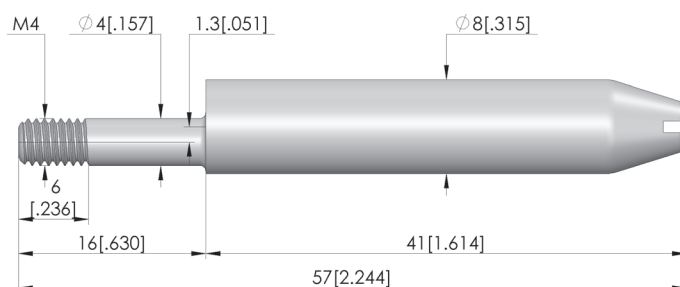

General data

Product group:

Pre-centering pins

Series:

VZ

Type:

Pre-centring pin, round, eccentric

Version:

Not ESD compliant

Accessory type:

Customising accessories

Material:

1.0037, galvanised

Colour:

Silver

Weight:

0.01 kg [0.022 lbs]

Min. temperature:

10 °C [50 °F]

Max. temperature:

60 °C [140 °F]

RoHS-compliant:

Yes

Compatible with

Exchangeable kits version:

No limitations

Manual test fixtures (MA):

MA 2012

Vacuum test fixtures (VA):

VA xxxx

MA exchangeable kits (ATS MA):

ATS MAxx

VA exchangeable kits (ATS VA):

ATS VINxxx

PA exchangeable kits (ATS PA):

ATS PAZxxx

Interchangeable kits (WS):

WS

For dual-stage contacting:

Yes

Technical data

Installation:

Full dog point M4

Length:

41 mm [1.61 in]

Diameter:

8 mm [0.314 in]

Pre-centering pin

VZ-R-08-41-M-X

Item 2519



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB