GKS-912 207 200 R 0604


Item GKS-912-1838







- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Version with central beading ensure low wobble for contacting small test points
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



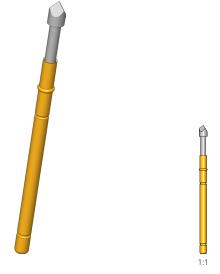







General data

Product group: ICT / FCT (in-circuit test and function test Sub-product group: Metric standard Series: GKS-912 Grid: 2.54 mm [100 mil] Contacting from: Magnetic: Yes Installation type: Plug-in Quick-exchange system: Yes

Adjustable installation height: Non-rotating: Compatible receptacle(s): Min. temperature: Max. temperature: RoHS-compliant:

function test Tip style:
tric standard Tip diameter:
GKS-912 Tip style surface:
nm [100 mil] Tip style material:

No

No

Yes

KS-112

-40 °C [-40 °F]

80 °C [176 °F]

07 90° 3-edged chisel, self-cleaning 2 mm [.078 in] R rhodium 2 steel

Electrical data

Current load capacity / rated current: 5 A
Typical resistance (Ri): 20 mOhm

Mechanical data

 Total length:
 34 mm [1.33 in]

 Barrel diameter:
 1.66 mm [.065 in]

 Maximum stroke:
 5 mm [.196 in]

 Spring pre-load:
 0.2 N [.719 ozf]


 Collar height:
 04

 Spring force at working stroke:
 0.6 N [2.15 ozf]

 Recommended working stroke:
 4 mm [.157 in]

Test Probe

Item GKS-912-1838

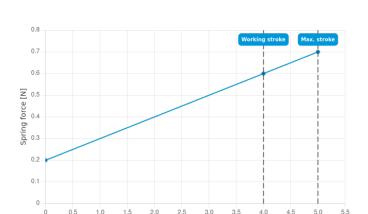

Stroke [mm]



Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com









Learn more about **ICT/FCT Test probes**



ingun.com