

Test Probe INGUN E-Type

E-135 270 026 E 2800


Item E-135-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

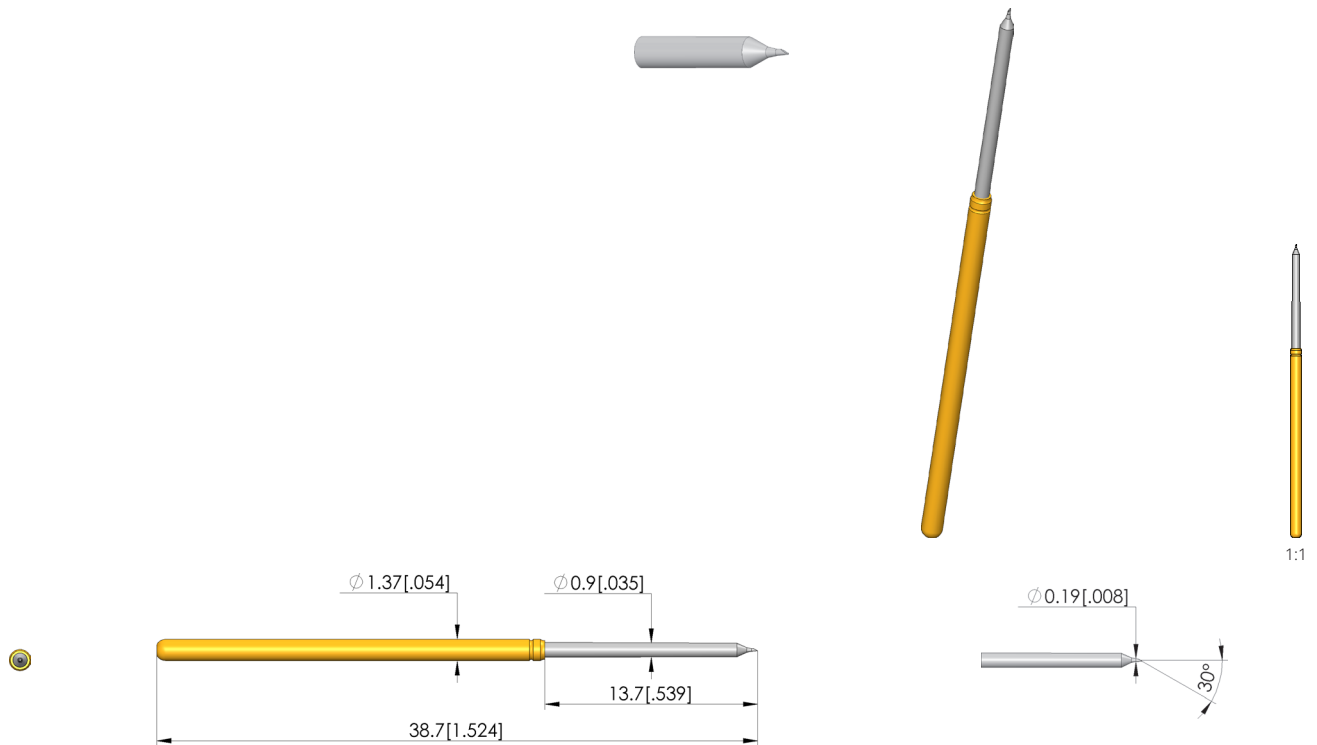

General data

| | |
|---------------------------------|---|
| Product group: | ICT / FCT (in-circuit test and function test) |
| Sub-product group: | INGUN E-TYPE® |
| Series: | E-135 |
| Grid: | 2.54 mm [100 mil] |
| Contacting from: | Pad |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Compatible receptacle(s): | KS-100 |
| Min. temperature: | -40 °C [-40 °F] |
| Max. temperature: | 80 °C [176 °F] |
| RoHS-compliant: | Yes |

Tip style data

| | |
|---------------------|----------------------------------|
| Tip style: | 70 asymmetric slanted needle tip |
| Tip diameter: | 0.2 mm [.007 in] |
| Tip style surface: | E palladium / nickel |
| Tip style material: | 2 steel |

Electrical data

| | |
|--|---------|
| Current load capacity / rated current: | 5 A |
| Typical resistance (Ri): | 30 mOhm |

Mechanical data

| | |
|---------------------------------|-------------------|
| Total length: | 38.7 mm [1.52 in] |
| Barrel diameter: | 1.37 mm [.053 in] |
| Maximum stroke: | 11.5 mm [.452 in] |
| Spring pre-load: | 0.78 N [2.8 ozf] |
| Collar height: | 00 |
| Spring force at working stroke: | 2.8 N [10 ozf] |
| Recommended working stroke: | 9.3 mm [.366 in] |

Test Probe INGUN E-Type

E-135 270 026 E 2800


Item E-135-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

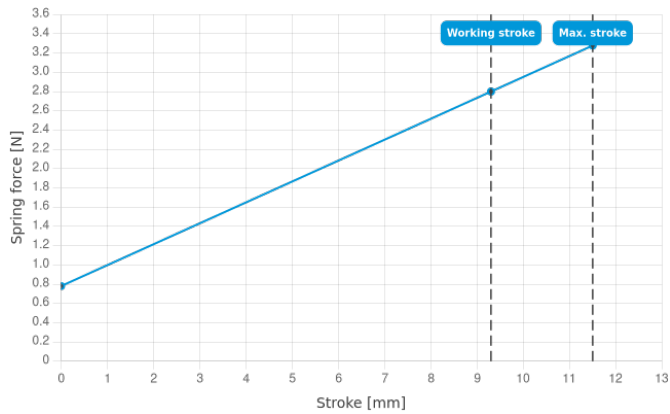

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com