

Contact terminal

KT-158 06


Item 21814



GO TO PRODUCT

ingun[®]

Partner for Future Technology

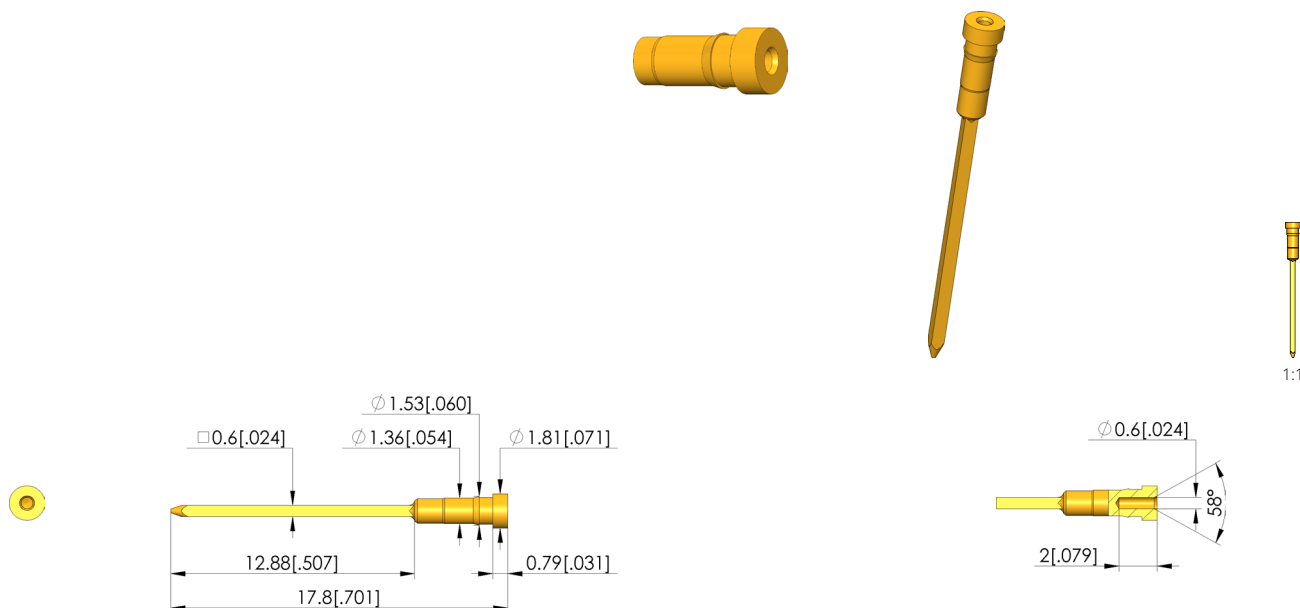

General data

Product group:

Series:

Sub-series:

Grid:

Type of contact terminal connection:

Installation height:

Installation type:

Quick-exchange system:

Surface area:

Material:

Knurl:

RoHS-compliant:

Contact terminals (KT)

KT-158

KT-158

2.54 mm [100 mil]

Wire-wrap

0.8 mm [.031 in]

Press-in

No

A gold

1 brass

No

Yes

Tip style data

Tip style:

Tip diameter:

Bore Ø in tip style:

43 inverse cone with chamfered bore

1.8 mm [.07 in]

0.6 mm [.023 in]

Mechanical data

Collar height:

Total length:

Shaft diameter:

Latching lug:

01

17.8 mm [.7 in]

1.35 mm [.053 in]

Yes

Mounting hole

Mounting hole in CEM1:

Mounting hole in FR4:

1.44 – 1.46 mm [.056 – .057 in]

1.44 – 1.46 mm [.056 – .057 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com

CONTACT TERMINALS