

Stroke Measurement Probe

HMS-422 305 130 A


Item HMS-422-0001



GO TO PRODUCT

ingun[®]

Partner for Future Technology

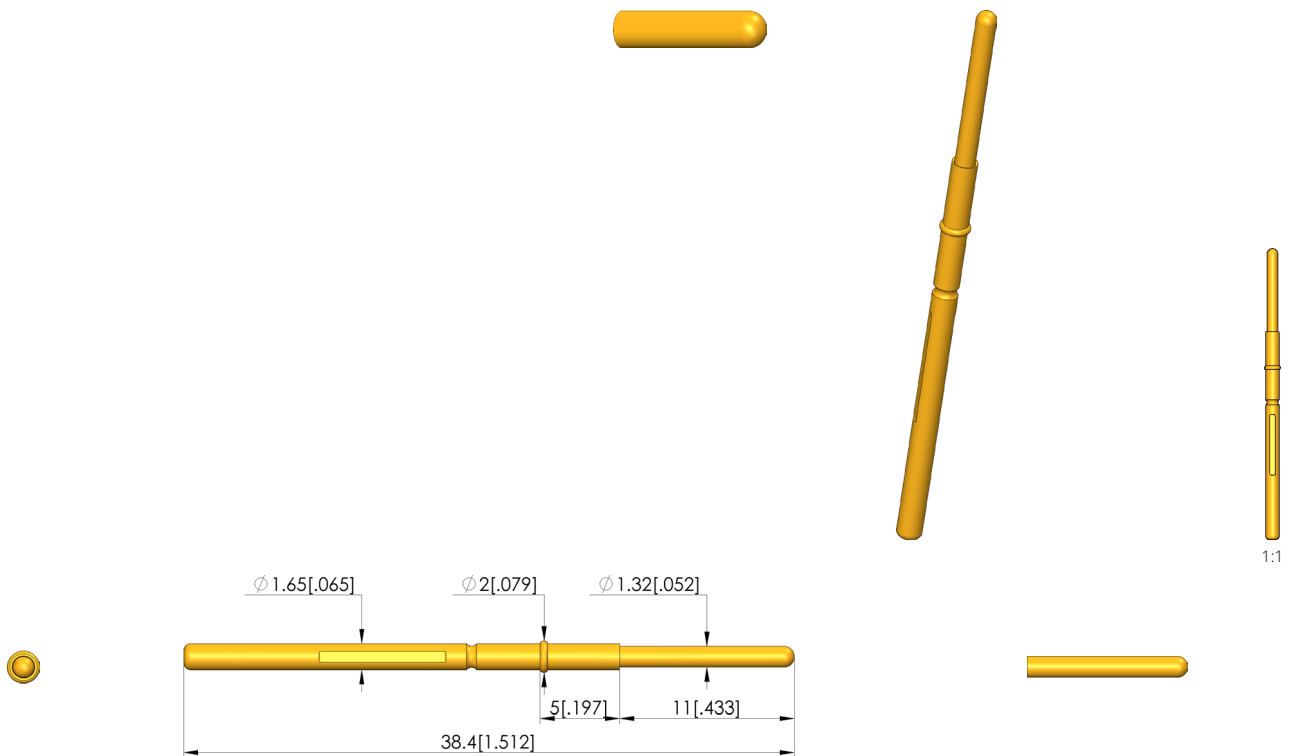

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
Stroke-measuring probe
HMS-422
2.54 mm [100 mil]
Pad
Yes
Plug-in
Yes
No
No
KS-112
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

05 bullet-nosed (full radius)
1.3 mm [.051 in]
A gold
3 CuBe

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Collar height:
Recommended working stroke:

38.4 mm [1.51 in]
1.65 mm [.064 in]
8 mm [.314 in]
05
6.4 mm [.251 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes

