## **HIGH-CURRENT TEST PROBES**

## High-current test probe

### HSS-120 306 400 A 1010


Item HSS-120-0174







- Trusted, robust high-current probes, optimally sized for current load capacity ratio
- Low-Ohm probe with Ri typical: < 10 mOhm</li>
- For use in function and burn-in tests
- Large selection of tip styles and spring forces for optimum contact with DUT
- Optimum adjustment of the stroke ratios in the test fixture: The test probe collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights











### **General data**

Product group: Sub-product group: Series:

Grid:

Contacting from:

Magnetic:

Installation type:

Quick-exchange system:

Adjustable installation height:

Non-rotating:

Compatible receptacle(s):

Min. temperature:

Max. temperature:

RoHS-compliant:

Standard HSS (press-in)

Standard HSS (press-in) HSS-120

4.5 mm [177 mil]

Post

Yes Plug-in

Yes No

No KS-113

Yes

-100 °C [-148 °F]

200 °C [392 °F]

Tip style data

Tip style: Tip diameter:

Tip style surface:

Tip style material:

**Electrical data** 

Current load capacity / rated current:

Typical resistance (Ri):

**Mechanical data** 

Total length: Barrel diameter:

Maximum stroke:

Spring pre-load:

Collar height:

Spring force at working stroke:

Recommended working stroke:

06 serrated

4 mm [.157 in] A gold 3 CuBe

5 A 10 mOhm

35.3 mm [1.38 in] 2.65 mm [.104 in] 5.3 mm [.208 in] 0.26 N [.935 ozf]

> 10 1 N [3.59 ozf] 4 mm [.157 in]


# **HIGH-CURRENT TEST PROBES**

## High-current test probe HSS-120 306 400 A 1010

Item HSS-120-0174





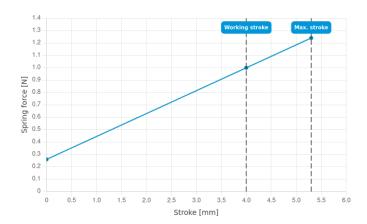

### **INGUN** Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com







High-current test probes



Learn more about