

# Contact terminal

## KT-S-050 67 24

Item KT-S050-0003



GO TO PRODUCT

**ingun**<sup>®</sup>



Partner for Future Technology

- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

**NEW**



1:1

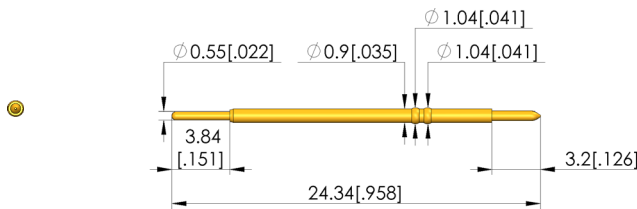

### General data

Product group: Contact terminals (KT)  
 Series: KT-S050  
 Sub-series: KT-S050 standard  
 Grid: 1.27 mm [50 mil]  
 Type of contact terminal connection: Wireless  
 Magnetic: Yes  
 Installation type: Press-in  
 Quick-exchange system: No  
 Surface area: A gold  
 Knurl: No  
 RoHS-compliant: Yes

Contact terminals (KT)  
 KT-S050  
 KT-S050 standard  
 1.27 mm [50 mil]  
 Wireless  
 Yes  
 Press-in  
 No  
 A gold  
 No  
 Yes

### Tip style data

Tip diameter: 0.64 mm [.025 in]

### Mechanical data

Total length: 24.3 mm [.958 in]  
 Shaft diameter: 0.9 mm [.035 in]  
 Latching lug: No

### Mounting hole

Mounting hole in CEM1: 0.97 – 0.99 mm [.038 – .038 in]  
 Mounting hole in FR4: 0.97 – 0.99 mm [.038 – .038 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
 78467, Constance, Germany  
 Phone +49 7531 8105-0  
 Customer hotline +49 7531 8105-888  
 Fax +49 7531 8105-65  
 info@ingun.com



Prices and delivery times on request.  
 Technical changes reserved. 03/26\_GB

Learn more about  
 Test probes



ingun.com