


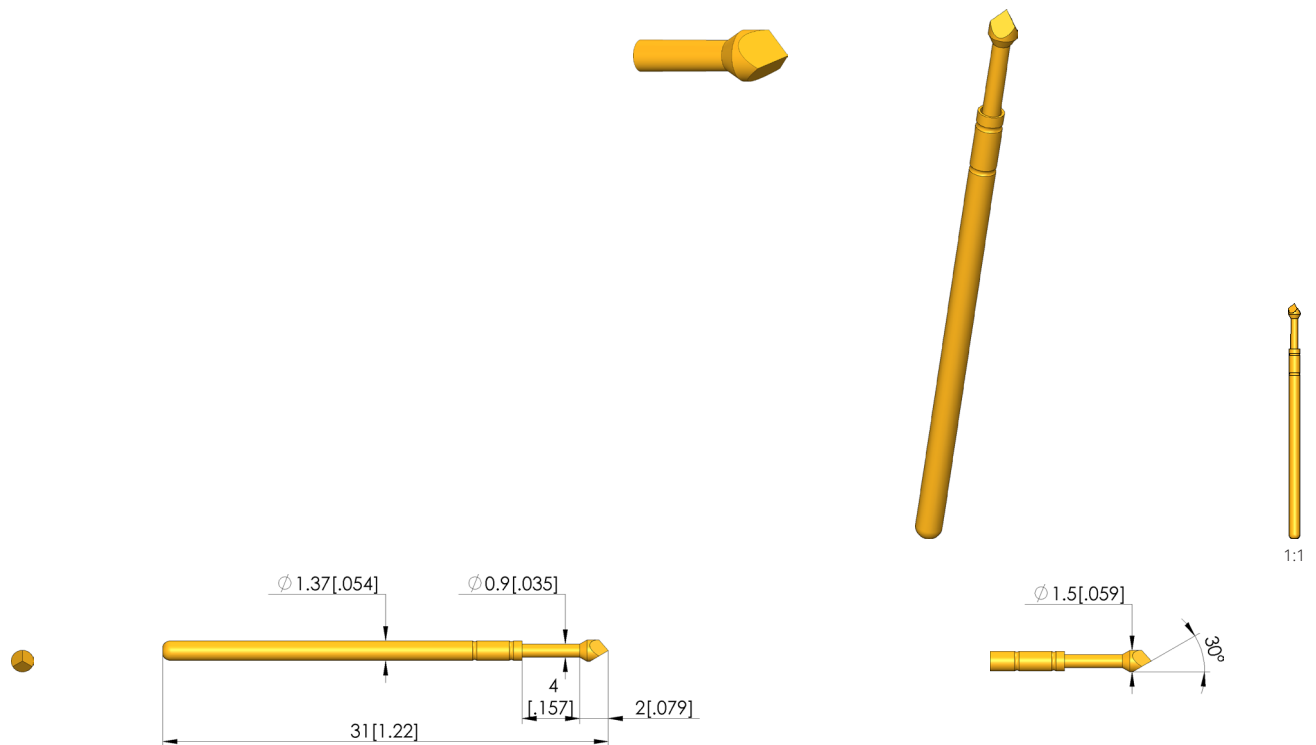

General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	Interface block probes
Series:	GKS-100
Grid:	2.54 mm [100 mil]
Contacting from:	Yes
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	57 30° 3-edged chisel, self-cleaning, special length
Tip diameter:	1.5 mm [.059 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	20 mOhm

Mechanical data

Total length:	31 mm [1.22 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	4 mm [.157 in]
Spring pre-load:	0.35 N [1.25 ozf]
Collar height:	00
Spring force at working stroke:	1.2 N [4.31 ozf]
Recommended working stroke:	3 mm [.118 in]

Test Probe


GKS-100 357 150 A 1000

Item GKS-100-0367



ingun[®]

Partner for Future Technology

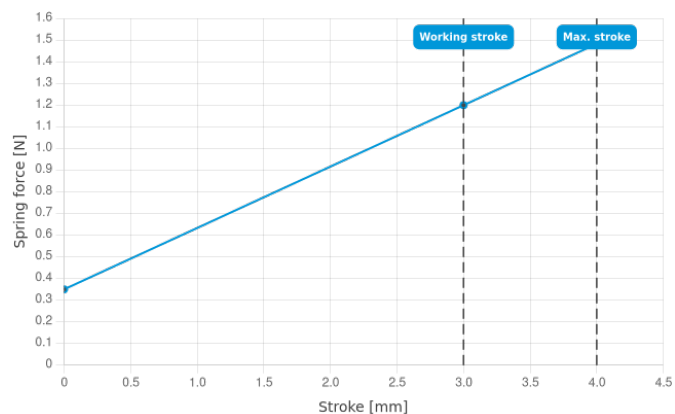

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes

