

Cable plug assembly, coaxial

SE-FLX405-50SMPMFG030SMAMG

Item SE-FLX405-0012




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

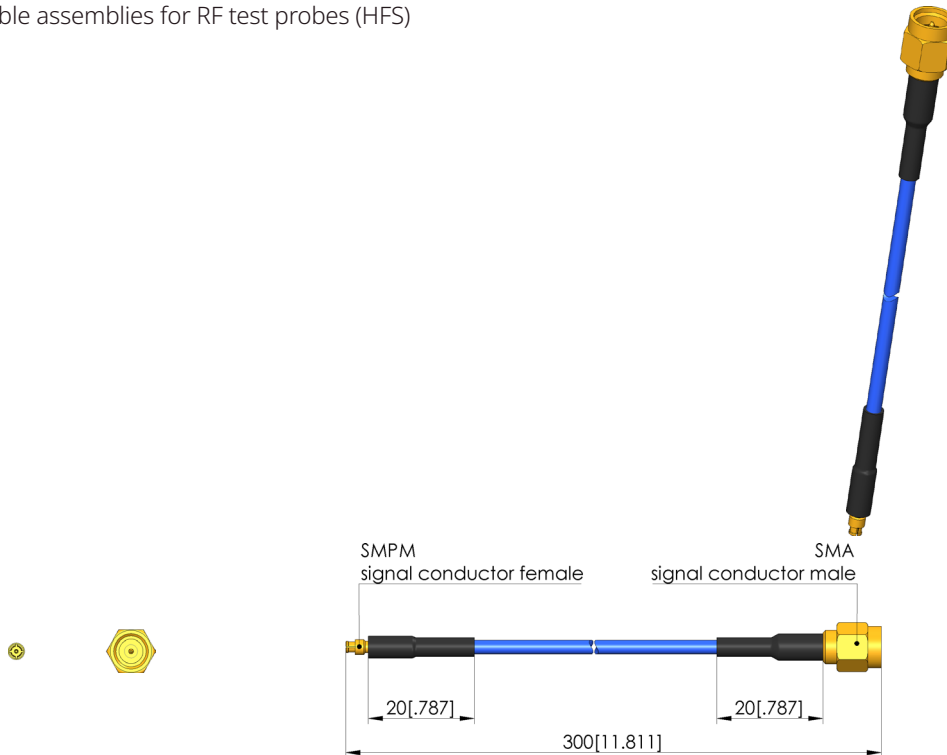

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength:
Attenuation coefficient a:
Attenuation coefficient b:

Assemblies
SE-FLX405
SE-FLX405 plug
-65 °C [-85 °F]
165 °C [329 °F]
Yes

18 GHz
50 Ohm
Simple
28 W
117 FLX405
.34 kV
0,69120 FLX405
0,04120 FLX405

Cable data

Cable length:
Cable type:
Kink protection cable:
Attenuation Fmax:

300 mm [11.8 in]
RTK-FLEX405-SPC-FEP
Shrink-on sleeve, black, 20 mm
1.1 dB

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:
Interface gender 2:
Version 2:
Moment interface 1:
Moment interface 2:

SMPM mini-SMP
F signal conductor female / socket
Straight
SMA
M signal conductor male / plug
Straight
15 cNm [1.32 lbf·in]
45 cNm [3.98 lbf·in]

Cable plug assembly, coaxial


SE-FLX405-50SMPMFG030SMAMG

Item SE-FLX405-0012



ingun[®]

Partner for Future Technology

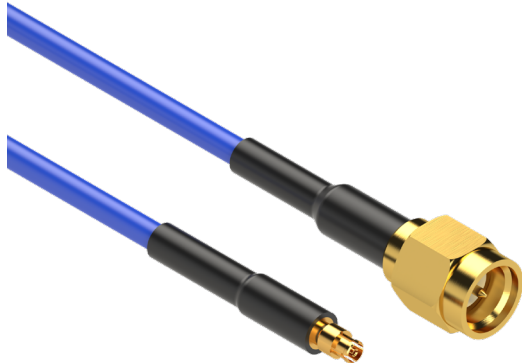

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



PLUG AND CABLE

ingun.com