

Receptacle

KS-VF25 V

Item KS-VF25V




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

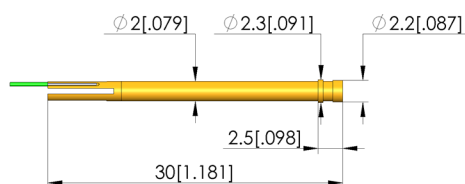

General data

Product group:

Series:

Sub-series:

Type of receptacle connection:

Press ring:

Surface area:

Collar diameter:

Collar height:

Knurl:

Vacuum-tight:

RoHS-compliant:

Receptacles (KS)

KS-VF25

KS-VF25 press-in version with bayonet clasp

Solder outer surface

No

Gold

2.3 mm [.09 in]

2.5 mm [.098 in]

No

No

Yes

Wiring data

Wire type AWG:

Wire type:

Insulating material:

Wire outer diameter:

Wire length:

Wire colour:

Kink protection:

34

Stranded wire

Teflon

0.35 mm [.013 in]

200 mm [7.87 in]

Green

No

Mechanical data

Total length:

Outer diameter:

30 mm [1.18 in]

2 mm [.078 in]

Mounting hole

Mounting hole in CEM1:

Mounting hole in FR4:

2 mm [.078 in]

2 mm [.078 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES