

Pre-centering pin VZ-R-8-22-M-X-M2

Item 2517



GO TO PRODUCT


ingun[®]

Partner for Future Technology



- Trusted pre-centring for positioning the PCB on the probe field
- HFS-802 H-MTD Kontaktstifte

Application

Pre-centring pins (VZ) are mounted onto the moving plate, and are used as insertion aids to pre-position DUTs simply and quickly on the probe field.

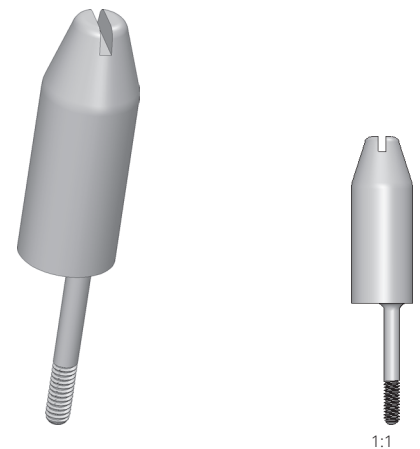

1:1

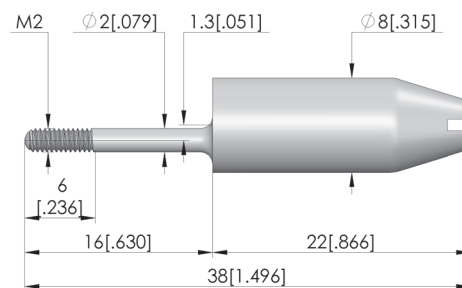

General data

Product group:	Pre-centering pins
Series:	VZ
Type:	Pre-centring pin, round, eccentric
Version:	Not ESD compliant
Accessory type:	Customising accessories
Material:	1.0037, galvanised
Colour:	Silver
Weight:	0.01 kg [.022 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Exchangeable kits version:	No limitations
Manual test fixtures (MA):	MA 2012
Vacuum test fixtures (VA):	VA xxxx
MA exchangeable kits (ATS MA):	ATS MAxx
VA exchangeable kits (ATS VA):	ATS VINxxx
PA exchangeable kits (ATS PA):	ATS PAZxxx
Interchangeable kits (WS):	WS
For dual-stage contacting:	Yes

Technical data

Installation:	Tappet M2
Length:	22 mm [.866 in]
Diameter:	8 mm [.314 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB