

Receptacle

KS-899 30 M-R

Item KS-89930M-R



ingun[®]

Partner for Future Technology



Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

INGUN SELECTION

Note:

The receptacle contains an axial bore for leakage testing. This can be closed by soldering on a cable. The receptacle is vacuum-tight after the soldering process. Caution: If handled incorrectly, solder can reach the inner surface of the receptacle.

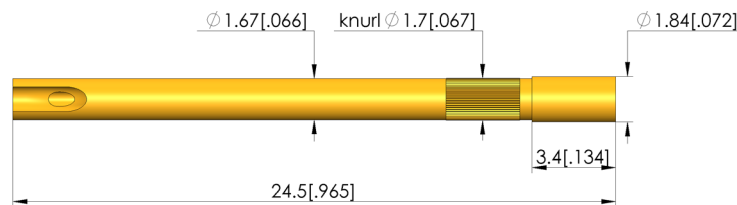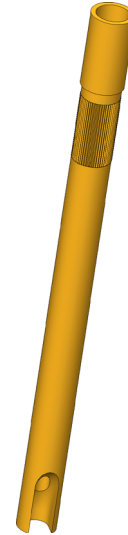

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-899
KS-899 M screw-in version
Solder
No
Gold
1.84 mm [.072 in]
3.4 mm [.133 in]
Yes
No
Yes

Mechanical data

Total length: 24.5 mm [.964 in]
Outer diameter: 1.67 mm [.065 in]

Mounting hole

Mounting hole in CEM1: 1.67 – 1.68 mm [.065 – .066 in]
Mounting hole in FR4: 1.67 – 1.68 mm [.065 – .066 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES