

Dual-stage locking unit motor

FB-2VM-MOT-MAxxxx

Item 112801




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Upgrade kits to make operation easier, increase the testing reliability, and to reduce handling times
- Available for manual test fixtures and exchangeable kits
- Wide range of varying functions

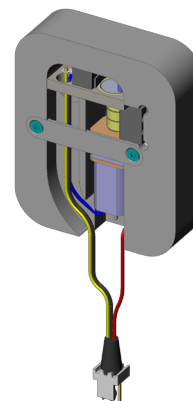

General data

Product group:	Functional units
Series:	FB-MAxxxx
Type:	Upgrade kit to replace telescopic cover strut
Version:	Dual-stage locking unit motor
Accessory type:	Additional function
Scope of delivery:	Pre-assembled
Width:	15 mm [.59 in]
Height:	60 mm [2.36 in]
Weight:	0.06 kg [.132 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Accessories:	FB-2VM-SO-MAxxxx
--------------	------------------

Technical data

Connection:	Plug connector
Max. voltage:	36 VDC
Number of poles:	3
Length:	50 mm [1.96 in]
Cable length:	50 mm [1.96 in]
Outer dimensionS (WxDxH):	15 x 50 x 60 mm [.59 x 1.96 x 2.36 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com