




- Quick, tool-free set-up, can be used without readjustment
- Available in standard and ESD versions, without internal interface
- Signal transmission using VG multipoint connectors for individual configurations

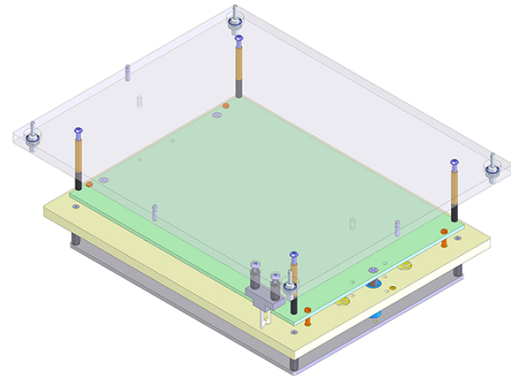

### General data

|                            |                                               |
|----------------------------|-----------------------------------------------|
| Product group:             | ATS pneumatic test fixture (PA)               |
| Subseries:                 | ATS PAxxxx                                    |
| Series:                    | ATS PA2130                                    |
| Version:                   | With interface                                |
| Scope of delivery:         | Assembled                                     |
| For tandem fixtures:       | No                                            |
| Max. interface signals:    | 350                                           |
| Interface blocks required: | No                                            |
| Internal interface:        | Not available                                 |
| Dual-stage contacting:     | No                                            |
| Double-sided contact:      | <p>Yes, with compatible additional option</p> |
| Min. temperature:          | 10 °C [50 °F]                                 |
| Max. temperature:          | 60 °C [140 °F]                                |
| Low voltage:               | No                                            |
| RoHS-compliant:            | Yes                                           |

### Compatible with

|                               |         |
|-------------------------------|---------|
| Pneumatic test fixtures (PA): | PA 2130 |
|-------------------------------|---------|

### Technical data

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| Pushrod length:                         | 51 mm [2 in]                             |
| Test probe installation height, bottom: | 10.5 mm [.413 in]                        |
| Free space above PCB:                   | 49 mm [1.92 in]                          |
| Permissible test voltage:               | 25 VAC / 60 VAC                          |
| Compressed air supply:                  | 4 – 6 bar [58 – 87 psi]                  |
| Useable area (WxD):                     | 250 x 200 mm [9.84 x 7.87 in]            |
| Outer dimensionS (WxDxH):               | 358 x 288 x 142 mm [14 x 11.3 x 5.59 in] |

Exchangeable kit


## ATS PA2130

Item 21117



**ingun**<sup>®</sup>

Partner for Future Technology

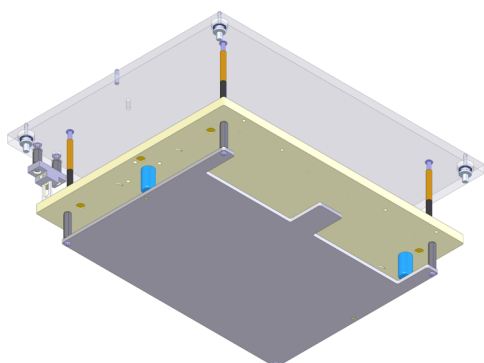

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB

Learn more about  
Test fixture kits

