


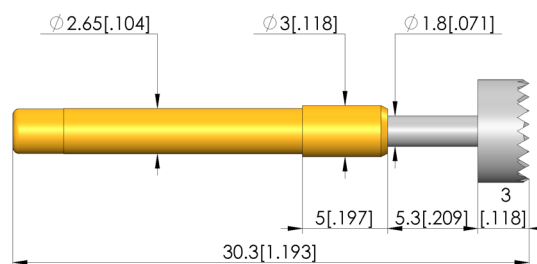




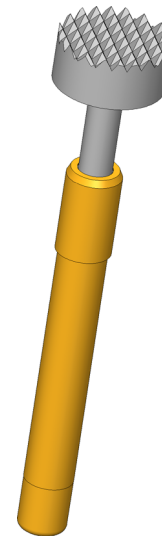

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture:
The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-113
 6.5 mm [255 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-113
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

06 serrated
 6 mm [.236 in]
 R rhodium
 3 CuBe

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

5 A
 30 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

30.3 mm [1.19 in]
 2.65 mm [.104 in]
 5.3 mm [.208 in]
 0.33 N [1.18 ozf]
 5
 1 N [3.59 ozf]
 4 mm [.157 in]

Test Probe

GKS-113 306 600 R 1005

Item GKS-113-1184



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com