

Receptacle

KS-612 600 35 M-R


Item KS-61260035M-R




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

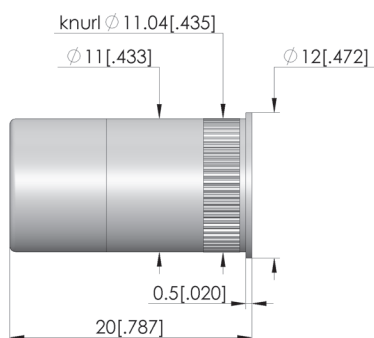

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-612
KS-612 M-D06 screw-in version
Solder outer surface
No
Silver
12 mm [.472 in]
0.5 mm [.019 in]
Yes
No
Yes

Mechanical data

Total length:
Outer diameter:

20 mm [.787 in]
11 mm [.433 in]

Mounting hole

Mounting hole in CEM1:
Mounting hole in FR4:

11 – 11 mm [.433 – .433 in]
11 – 11 mm [.433 – .433 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com