





GO TO PRODUCT



- Component for the Opens test, for capacitive testing of semiconductor chips for open circuits, short circuits and soldering faults
- Suitable for Teradyne test systems

Application

The FrameScan Plus sensor plate is used for capacitive testing of integrated circuits to check the wire-bonded connections inside an integrated circuit for open circuits, short circuits and soldering faults.



1:1



General data


Product group:	Opens tests
Series:	OTC
Type:	Teradyne opens test
Version:	Frame Scan Plus
Accessory type:	Customising accessories
Scope of delivery:	Sensor plate 015-011
Width:	11 mm [.433 in]
Height:	5.5 mm [.216 in]
Weight:	0.01 kg [.022 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):	VA 20xx
Interchangeable kits (WS):	WS Teradyne/TSH5x

Technical data

Length:	14.7 mm [.578 in]
Outer dimensionS (WxDxH):	14.7 x 11 x 5.5 mm [.578 x .433 x .216 in]

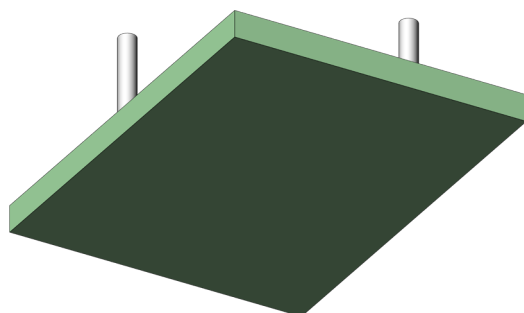

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

