








GO TO PRODUCT

- Precise, low-wear contacting of USB plug connectors
- Outstanding service life
- Reliable data transmission
- Signal transmission via original connector plug or solder connection
- Optional spring elements (112863: set of 2) can compensate for tolerances of ± 0.4 mm and positioning inaccuracies.

INGUN SELECTION

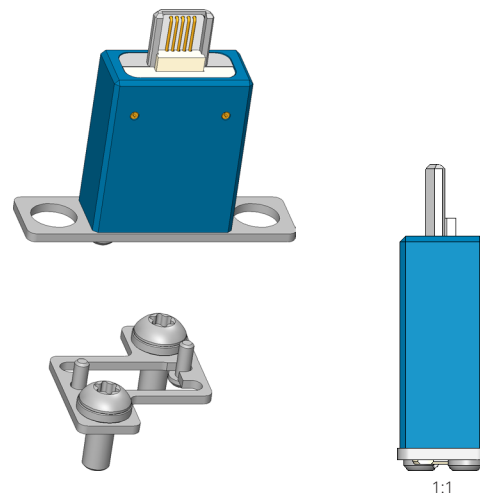

1:1

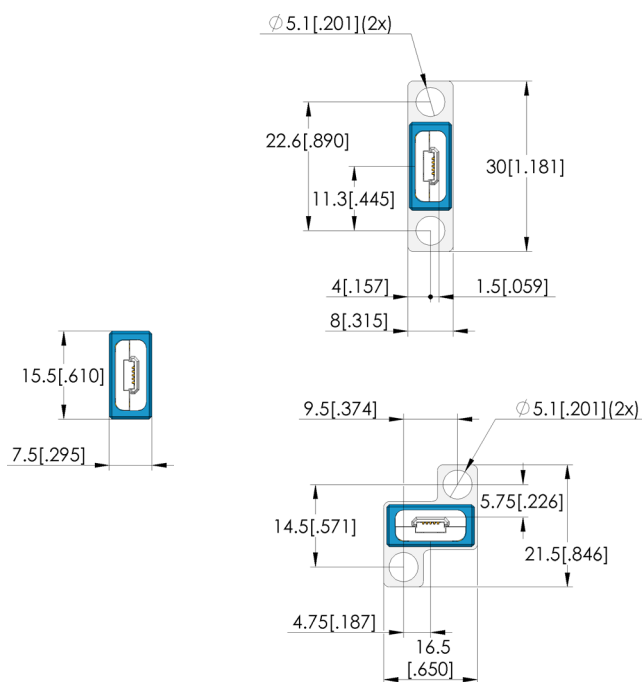

- M3x8 T10 (2x)
- M1.6x4 T5 (4x)
- reducing washer (2x)



GO TO PRODUCT

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-USB
Grid:	8.5 mm [334 mil]
DUT / contact:	USB MICRO Type B
DUT interface gender :	F signal conductor female / socket
Floating mount:	No
Continuous plunger:	No
Interface of compatible assembly:	USB MICRO-B
Compatible assembly interface gender :	F signal conductor female / socket
Width:	29 mm [1.14 in]
Height:	27 mm [1.06 in]
Min. temperature:	-20 °C [-4 °F]
Max. temperature:	75 °C [167 °F]
RoHS-compliant:	Yes

Inner conductor data


Exchangeable inner conductor:	No
Inner conductor max. current load capacity:	.5 A
Number of inner conductor poles:	5

Electrical data

Impedance:	90 Ohm
Max. data rate:	.48 Gbit/s
Maximum performance:	2.5 W

Mechanical data

Total length:	41 mm [1.61 in]
Installation height without receptacle:	26 mm [1.02 in]

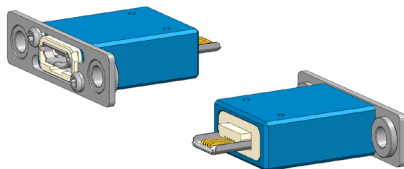**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Learn more about
Test probes

