

Interface

SST-4200/4210

Item 11930



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- Aeroflex (Marconi) 4200/4210 interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the bottom of the test fixture using a suitable interface frame.

Delivery

The interface is unpopulated upon delivery.

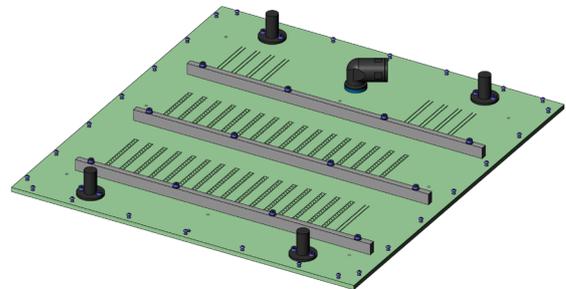

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Aeroflex (Marconi)
Version:	4200/4210
Accessory type:	Additional function
Scope of delivery:	Unpopulated, max. 2848 KT-158 02
Max. interface signals:	2048
Width:	483 mm [19 in]
Height:	49 mm [1.92 in]
Weight:	4.15 kg [9.14 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):	VA 4060
Accessories:	SSA-4200/4210

Technical data

Length:	514 mm [20.2 in]
Outer dimensionS (WxDxH):	483 x 514 x 49 mm [19 x 20.2 x 1.92 in]

Interface supports

Part no.	Designation	Version
113553	SSA-4200/4210-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB