

# Test Probe

## GKS-100 006 323 A 3000 LH

Item GKS-100-1861





GO TO PRODUCT

# ingun®

Partner for Future Technology

- Well-established test probes for contacting PCBs

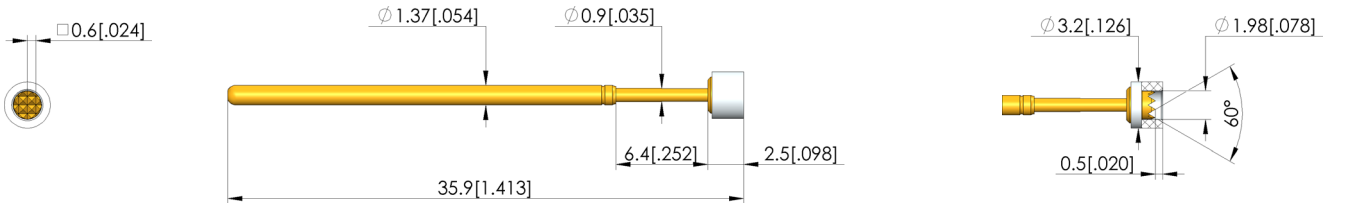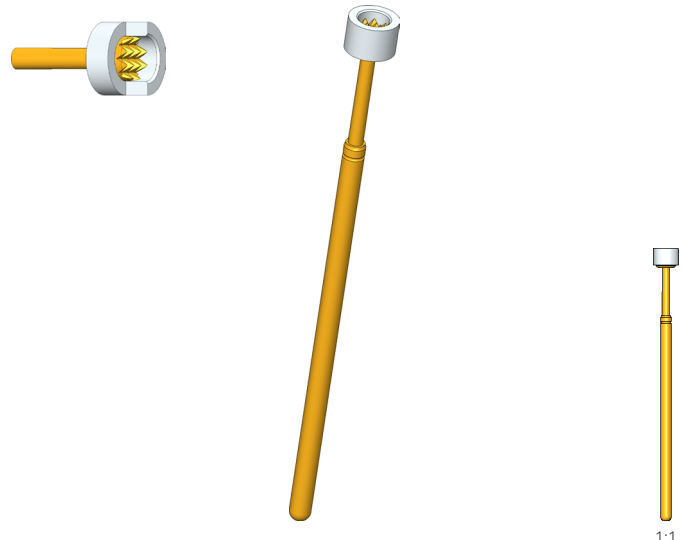

### General data

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Standard stroke test probe
Series:	GKS-100 LH long version
Grid:	3.5 mm [137 mil]
Contacting from:	Post
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

### Tip style data

Tip style:	006 serrated, outer-Ø insulated
Tip diameter:	3.23 mm [.127 in]
Tip style surface:	A gold
Tip style material:	0 plastic

### Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	20 mOhm

### Mechanical data

Total length:	35.9 mm [1.41 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	6.35 mm [.25 in]
Spring pre-load:	0.98 N [3.52 ozf]
Collar height:	00
Spring force at working stroke:	3 N [10.7 ozf]
Recommended working stroke:	4.3 mm [.169 in]

# Test Probe


## GKS-100 006 323 A 3000 LH

Item GKS-100-1861



**ingun**<sup>®</sup>

Partner for Future Technology

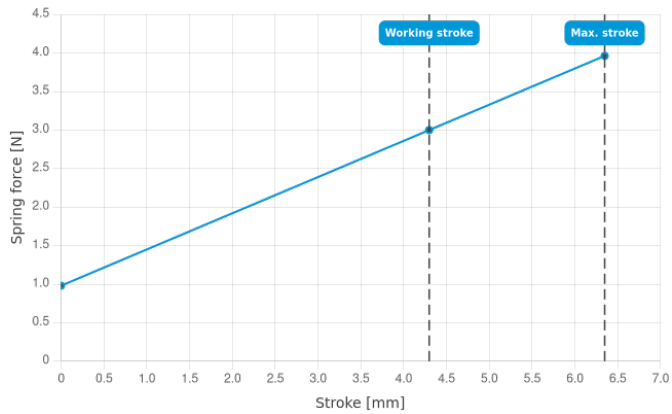

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 01/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com