

Interface

SST-TSO5x-2560

Item 109514



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- TERADYNE TSO5x interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Using the interface as a connection/transfer mechanism, signals can be reliably transmitted between the test fixture and the test system. It is installed on the bottom of the test fixture using a suitable interface frame.

Delivery

The interfaces are delivered fully loaded.

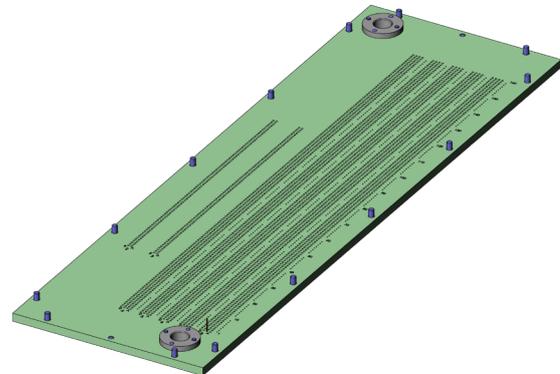

General data

Product group:	Fixture interfaces
Series:	SST
Type:	Teradyne
Version:	TSO5x
Accessory type:	Additional function
Scope of delivery:	Equipped, 3520 KT-158 02
Max. interface signals:	2560
Width:	152 mm [5.98 in]
Height:	6.5 mm [.255 in]
Weight:	0.95 kg [2.09 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):	VA 4060
Accessories:	SSA-TSO5x

Technical data

Length:	496 mm [19.5 in]
Outer dimensionS (WxDxH):	152 x 496 x 6.5 mm [5.98 x 19.5 x .255 in]

Interface supports

Part no.	Designation	Version
113536	SSA-TSO5x-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB