

Test Probe

GKS-366 305 400 A 6001

Item GKS-366-0003




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Extremely robust test probes for applications with unwanted side and axial forces
- For use in applications with limited space

INGUN SELECTION

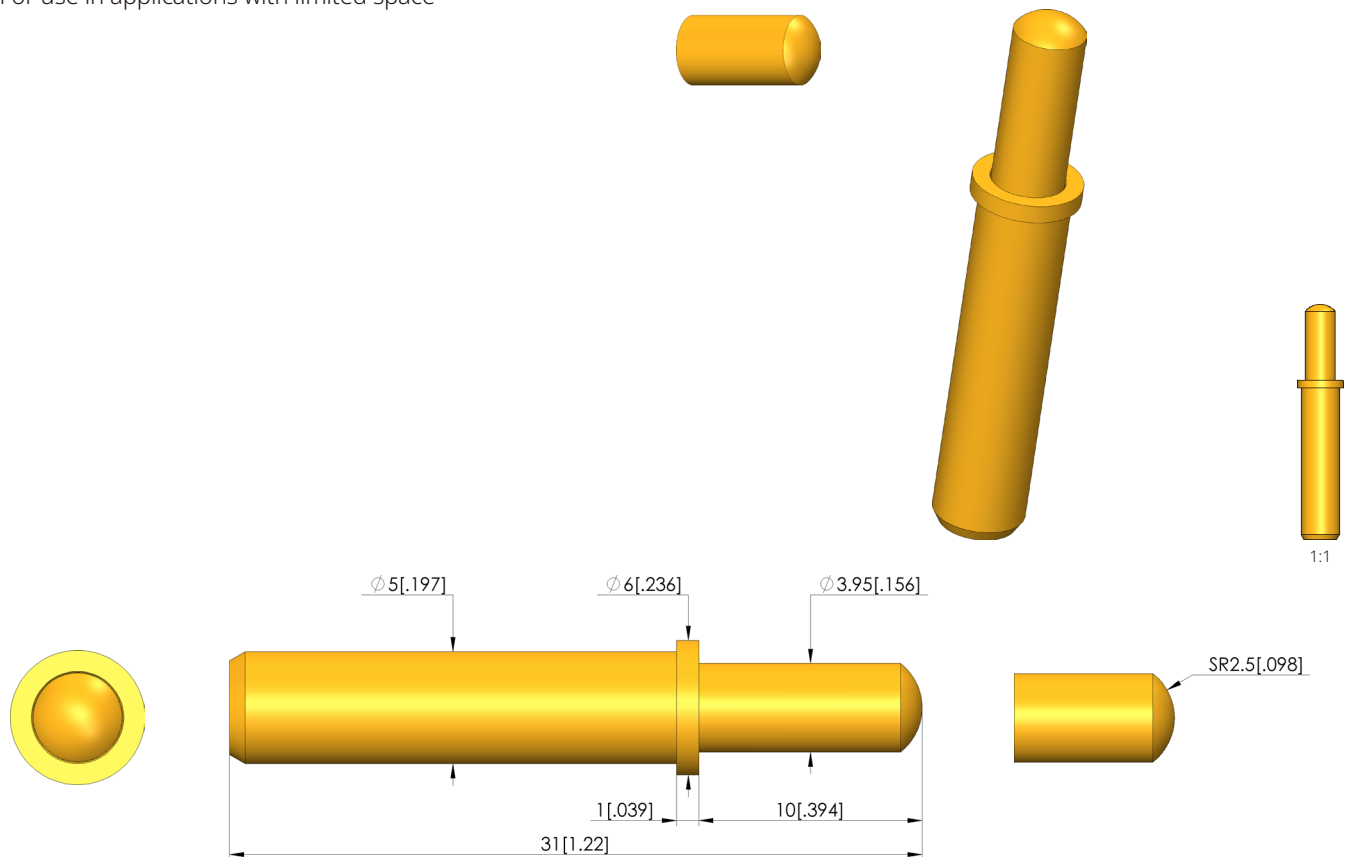

General data

Product group:	Assorted test probes
Sub-product group:	Short stroke GKS / charge and transfer GKS
Series:	GKS-366
Grid:	6.5 mm [255 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-366
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	05 bullet-nosed (full radius)
Tip diameter:	4 mm [.157 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	8 A
Typical resistance (Ri):	30 mOhm

Mechanical data

Total length:	31 mm [1.22 in]
Barrel diameter:	5 mm [.196 in]
Maximum stroke:	10 mm [.393 in]
Spring pre-load:	1.2 N [4.31 ozf]
Collar height:	01
Spring force at working stroke:	6 N [21.5 ozf]
Recommended working stroke:	8 mm [.314 in]

Test Probe


GKS-366 305 400 A 6001

Item GKS-366-0003



ingun[®]

Partner for Future Technology

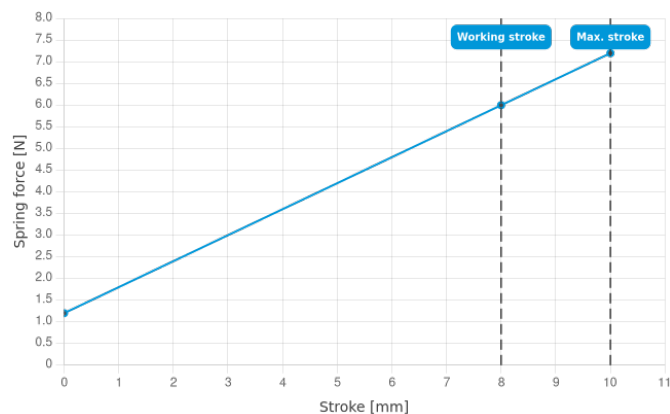

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

