

Cable plug assembly, coaxial

SE-MF86-50SMAMG080SMAMG

Item SE-MF86-0001




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

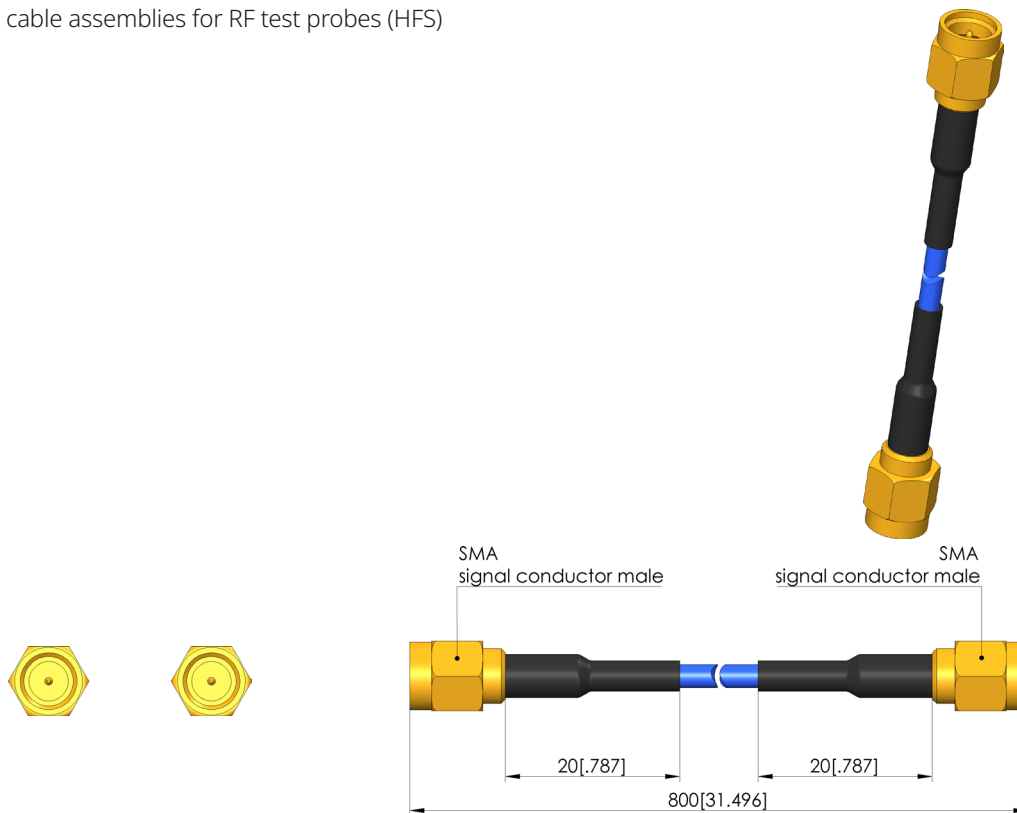

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength:
Attenuation coefficient a:
Attenuation coefficient b:

Assemblies
SE-MF86
SE-MF86 plug
-65 °C [-85 °F]
165 °C [329 °F]
Yes

Cable data

Cable length: 800 mm [31.4 in]
Cable type:
Kink protection cable: Shrink-on sleeve, black, 20 mm
Attenuation Fmax: 2.85 dB

Connector data

Interface 1: SMA
Interface gender 1: M signal conductor male / plug
Version 1: Straight
Interface 2: SMA
Interface gender 2: M signal conductor male / plug
Version 2: Straight
Moment interface 1: 45 cNm [3.98 lbf·in]
Moment interface 2: 45 cNm [3.98 lbf·in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

