

Pressure frame unit NDH-209-340-VL-ESD


Item 34301



GO TO PRODUCT

ingun[®]

Partner for Future Technology

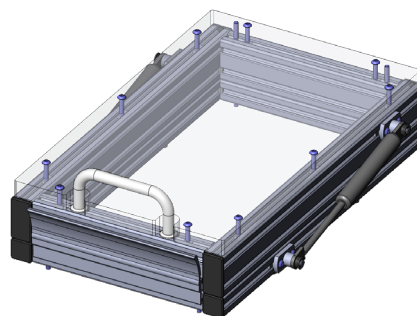

General data

Product group:
Series:
Type:
Version:
Accessory type:
Width:
Height:
Min. temperature:
Max. temperature:

Mounted units
NDH-VAxxxx
ESD
Locking strap
Additional function
250 mm [9.84 in]
103 mm [4.05 in]
10 °C [50 °F]
60 °C [140 °F]

Compatible with

Exchangeable kits version:

No limitations

Technical data

Pushrod length: 55.6 mm [2.18 in]
Free space above PCB: 54 mm [2.12 in]
Pressure frame opening angle: 85 °
Bearing distance: 168 x 300 x 60 mm [6.63 x 11.8 x 2.36 in]
Useable area (WxD): 128 x 260 mm [5.03 x 10.2 in]
Length: 360 mm [14.1 in]
Outer dimensionS (WxDxH): 250 x 360 x 103 mm [9.84 x 14.1 x 4.05 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

