


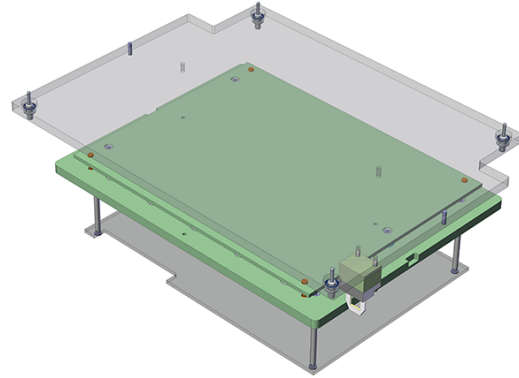

- Quick, tool-free set-up, can be used without readjustment
- Available in standard and ESD versions, with or without internal interface
- Signal transmission using VG multipoint connectors or contact terminals for individual configurations

**General data**

Product group:
Subseries:
Series:
Version:
Scope of delivery:
For tandem fixtures:
Max. interface signals:
Interface blocks required:
Max. internal interface blocks:
Internal interface:
Dual-stage contacting:
Double-sided contact:
Min. temperature:
Max. temperature:
Low voltage:
RoHS-compliant:

ATS pneumatic test fixture (PA)
ATS PAZxxx
ATS PAZ215
With interface
Assembled
No
768
No
0
Available
No
No
10 °C [50 °F]
60 °C [140 °F]
No
Yes

Compatible with

Pneumatic test fixtures (PA):

PAZ 215

Technical data

Pushrod length: 36.4 mm [1.43 in]
Test probe installation height, bottom: 10.5 mm [.413 in]
Free space above PCB: 36 mm [1.41 in]
Permissible test voltage: 25 VAC / 60 VDC
Compressed air supply: 4 – 6 bar [58 – 87 psi]
Useable area (WxD): 260 x 200 mm [10.2 x 7.87 in]
Outer dimensionS (WxDxH): 438 x 318 x 187 mm [17.2 x 12.5 x 7.36 in]

Exchangeable kit


ATS PAZ215

Item 18958



ingun[®]

Partner for Future Technology

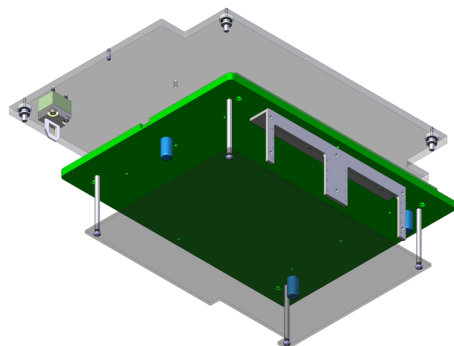

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

