



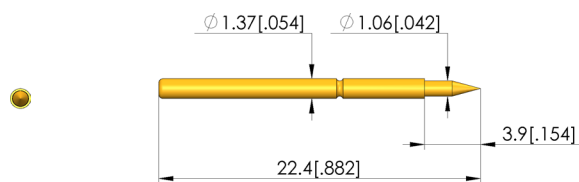

GO TO PRODUCT



General data

Product group:	Accessories (GKS / ADA)
Sub-product group:	Interface block probes
Series:	GKS-946
Grid:	2.54 mm [100 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-945
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data


Tip style:	01 30° needle tip, self-cleaning
Tip diameter:	1.06 mm [0.041 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	20 mOhm

Mechanical data

Total length:	22.4 mm [0.881 in]
Barrel diameter:	1.37 mm [0.053 in]
Maximum stroke:	3.9 mm [0.153 in]
Spring pre-load:	0.6 N [2.15 ozf]
Collar height:	00
Spring force at working stroke:	1.2 N [4.31 ozf]
Recommended working stroke:	3.2 mm [0.125 in]

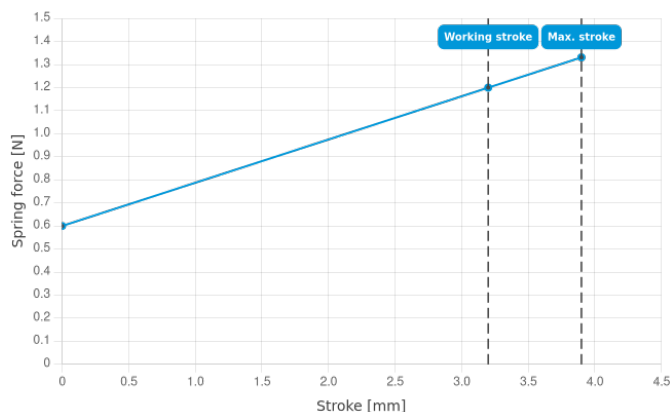

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test probes

