

Gas pressure spring

GDF-145-40-100N-A6-A6

Item 2504



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Trusted gas springs from the market leader
- Store with the piston rod facing downwards

Note:

The gas springs must be stored with the piston rod pointing downwards so that the seal remains moistened from the inside. It makes no difference whether the piston of the gas spring is extended (unloaded) or retracted (loaded).

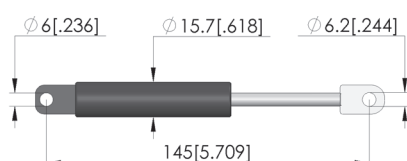

General data

Product group:
Series:
Type:
Version:
Accessory type:
Min. temperature:
Max. temperature:
RoHS-compliant:

Gas springs
GDF
Gas spring
Standard, attenuated
Spare parts
10 °C [50 °F]
60 °C [140 °F]
Yes

Technical data

Stroke: 40 mm [1.57 in]
Force: 100 N [359 ozf]
Length: 145 mm [5.7 in]
Gas pressure spring length, home position: 105 mm [4.13 in]
Plunger length, home position: 49 mm [1.92 in]
Installation 1 diameter: 6 mm [0.236 in]
Installation 2 diameter: 6.2 mm [0.244 in]

Gas pressure spring **GDF-145-40-100N-A6-A6**

Item 2504



ingun[®]
Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB