
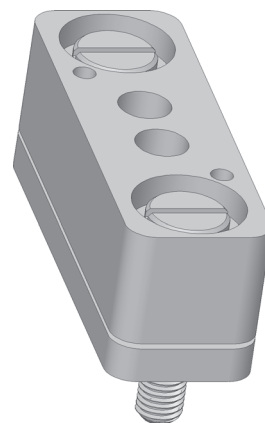


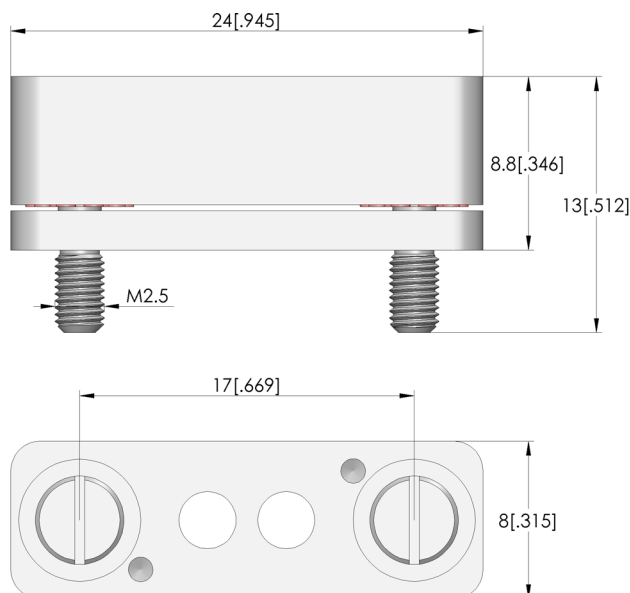

- Floating mount for HFS-807 radio-frequency probes for FA-KRA mini connectors with centring range: ± 0.6 mm, angular offset: $\pm 2^\circ$
- Easy replacement of the test probes from the DUT side, insert bit for screwing in: BIT-HFS-807 M-B, recommended tightening torque: 20 cNm
- Test probes from the HFS-807 series, e.g., HFS-807 303 051 A 6842 HFM-M or HFS-807 303 051 A 6842 HTE-M can be installed in the assembly.

NEW**Replacement part for HAS-807**

Floating base plate for double housing (vertical)

**General data**

Product group:
Series:
Sub-series:
Press ring:
Knurl:
Vacuum-tight:
RoHS-compliant:

Floating receptacles (HAS)
HAS-807
HAS-807 floating version
No
No
No
Yes

Mechanical data

Total length:

13 mm [.511 in]

Flexible receptacle

HAS-807-2-S

Item HAS-807-0007



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



RECEPTACLES

ingun.com