







Positionstest

Zur Überprüfung der korrekten Position des Kontaktterminals im Steckergehäuse



1:1

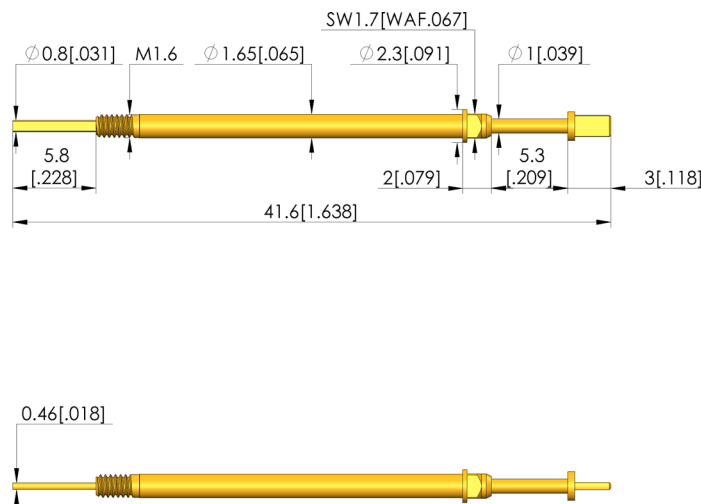

General data

Screw-in torque max.:	5 cNm [.442 lbf-in]
Product group:	Screw-in test probe
Sub-product group:	Non-rotating test probes
Series:	T-744
Grid:	2.54 mm [100 mil]
Contacting from:	Female connector
Magnetic:	Yes
Installation type:	Screw-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	Yes
Continuous plunger:	Ø0,8 x 0,46 x 5,8
Screw-in torque:	3 – 5 cNm [.265 – .442 lbf-in]
Compatible receptacle(s):	KS-744 M
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	20 spade, flat, bevelled, self-cleaning
Tip diameter:	1.5 mm [.059 in]
Tip style surface:	A gold
Tip style material:	3 CuBe
Step probe tip height:	2.5 mm [.098 in]
Disk diameter:	2 mm [.078 in]
Spade width:	0.5 mm [.019 in]

Electrical data

Current load capacity / rated current:	5 A
Current rating, connection on plunger:	8 A
Typical resistance (Ri):	30 mOhm
Typical resistance (Ri), connection on plunger:	10 mOhm

Mechanical data

Total length:	41.6 mm [1.63 in]
Barrel diameter:	1.65 mm [.064 in]
Maximum stroke:	5 mm [.196 in]
Spring pre-load:	0.6 N [2.15 ozf]
Collar height:	02
Spring force at working stroke:	1.5 N [5.39 ozf]
Recommended working stroke:	4.4 mm [.173 in]

Test Probe


T-744320050150250200A1502M

Item T-744-0002



ingun[®]

Partner for Future Technology

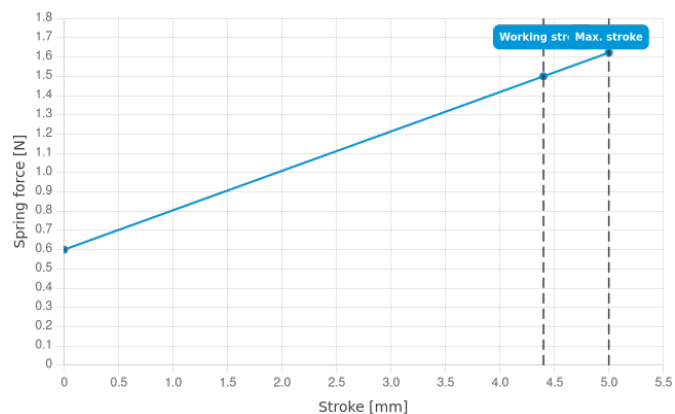

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Screw-in test probe



ingun.com

SCREW-IN TEST PROBE