

# Receptacle

## KS-050 30 E08

Item KS-05030E08




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### INGUN SELECTION

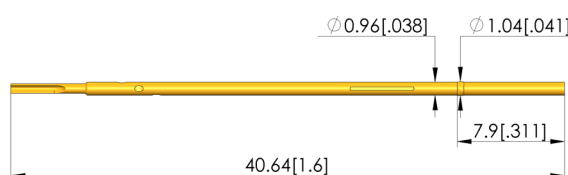

#### General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-050  
KS-050 press-in version  
Solder  
Yes  
Gold  
1.04 mm [.04 in]  
7.9 mm [.311 in]  
No  
No  
Yes

#### Mechanical data

Total length: 40.6 mm [1.59 in]  
Outer diameter: 0.95 mm [.037 in]

#### Mounting hole

Mounting hole in CEM1: 0.98 – 1 mm [.038 – .039 in]  
Mounting hole in FR4: 0.98 – 1 mm [.038 – .039 in]  
Mounting hole with press ring in CEM1: 0.98 – 1 mm [.038 – .039 in]  
Mounting hole with press ring in FR4: 0.98 – 1 mm [.038 – .039 in]

#### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB

Learn more about  
Test probes



ingun.com

RECEPTACLES