

# Locking unit - closed

## FB-VER-G-ESG-MAXxxx

Item 32665



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

- Secure locking of closed pressure frame during contacting

### Application

To lock the closed pressure frame during contacting to ensure tests are not interrupted.

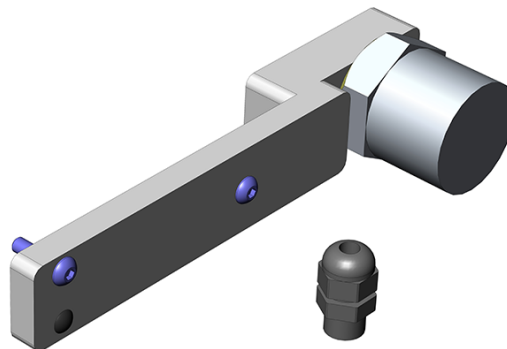

### General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Locking units

FB-MAXxxx

Additional function  
Must be installed upon delivery

50 mm [1.96 in]

37 mm [1.45 in]

0.3 kg [.661 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

### Compatible with

Manual test fixtures (MA):

Accessories:

MA xxxx

ATE VAXxxx

### Technical data

Stroke:

5 mm [.196 in]

Installation:

Thread M4

Max. voltage:


24 VDC (11 W)

Length:

153 mm [6.02 in]

Outer dimensionS (WxDxH):

50 x 153 x 37 mm [1.96 x 6.02 x 1.45 in]

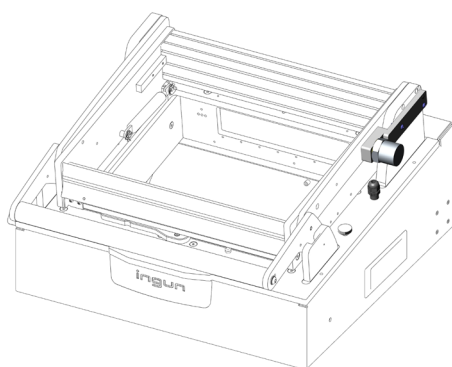

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB

Learn more about  
MA functional units



FUNCTIONAL UNIT

ingun.com