




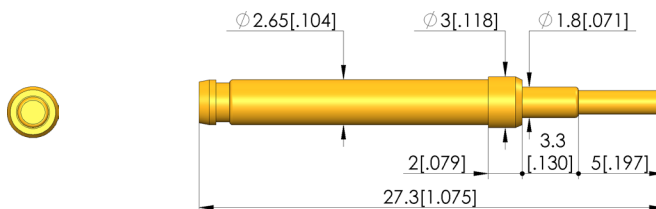

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture:  
The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



### General data

Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Compatible receptacle(s):  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

ICT / FCT (in-circuit test and function test)  
Metric standard  
GKS-113  
4 mm [157 mil]  
Post  
Yes  
Plug-in  
Yes  
No  
No  
KS-113  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

### Tip style data

Tip style: 02 flat  
Tip diameter: 1.4 mm [.055 in]  
Tip style surface: A gold  
Tip style material: 3 CuBe

### Electrical data

Current load capacity / rated current: 8 A  
Typical resistance (Ri): 30 mOhm

### Mechanical data

Total length: 27.3 mm [1.07 in]  
Barrel diameter: 2.65 mm [.104 in]  
Maximum stroke: 5.3 mm [.208 in]  
Spring pre-load: 0.5 N [1.79 ozf]  
Collar height: 02  
Spring force at working stroke: 1.5 N [5.39 ozf]  
Recommended working stroke: 4 mm [.157 in]

# Test Probe


## GKS-113 302 140 A 1502

Item GKS-113-0104



**ingun**<sup>®</sup>

Partner for Future Technology

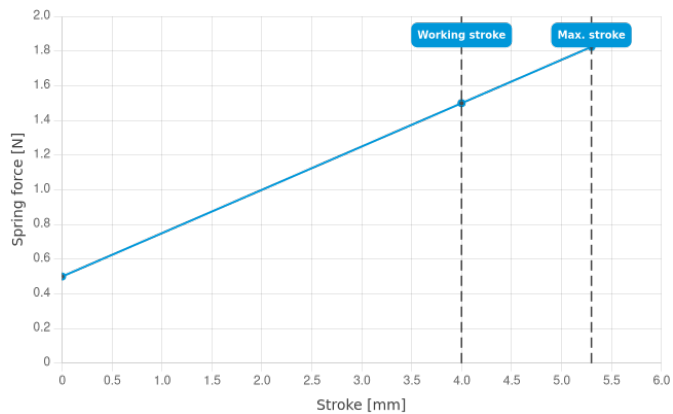

[ingun.address](https://www.ingun.com)



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
ICT/FCT Test probes



[ingun.com](https://www.ingun.com)

ICT/FCT TEST PROBES