Signal line strand

SLL-CK-2.0-AWG26-RT-700


Item 116052






- Stranded wire with crimp connection for 12-pole connector housing
- Consistently stable signal quality throughout
- Flexible stranded wire for the greatest possible freedom of movement
- Crimp connection with contact blade which ensures secure clamping with high retention force

The stranded wire is used for low-wear, quick-connect mating of connector housings without tools.

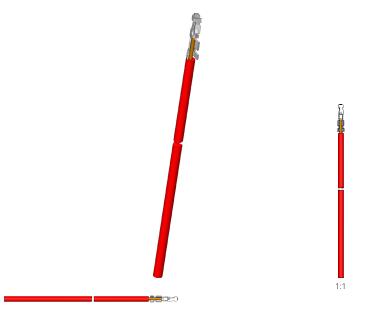



General data

Product group: Series: Type: Version: Accessory type: Scope of delivery: Material: Colour:

Min. temperature: Max. temperature: RoHS-compliant:

Electric accessory SLL Stranded wire Crimp connection Customising accessories Pre-wired Copper stranded wire, zinc plated Red

-20 °C [-4 °F] 80 °C [176 °F] Yes

Electrical data

Typical resistance (Ri) of one GKS: 85 mOhm

7.5 [.295]

Compatible with

Accessories: STV-BL12-F-C

Technical data

Connection: Force: Max. current: Max. voltage: Installation grid: Diameter: Cable length:

Plug / solder /crimp connection 2 N [7.19 ozf] 3.6 A 250 V 2 mm [.078 in] AWG26 mm

700 mm [27.5 in]

Signal line strand SLL-CK-2.0-AWG26-RT-700

Item 116052







Accessories

Part no.	Designation	Version	Assembly
Connecto	Connector housing		
116059	STV-BL12-F-C	1 row, 12 free slots, grid 2.00 mm	unloaded

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162 78467, Constance, Germany Phone +49 7531 8105-0 Customer hotline +49 7531 8105-888 Fax +49 7531 8105-65 info@ingun.com





