

Locking unit - closed FB-VER-G-P-MAxxxx

Item 49270



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Secure locking of closed pressure frame during contacting

Application

To lock the closed pressure frame during contacting to ensure tests are not interrupted.

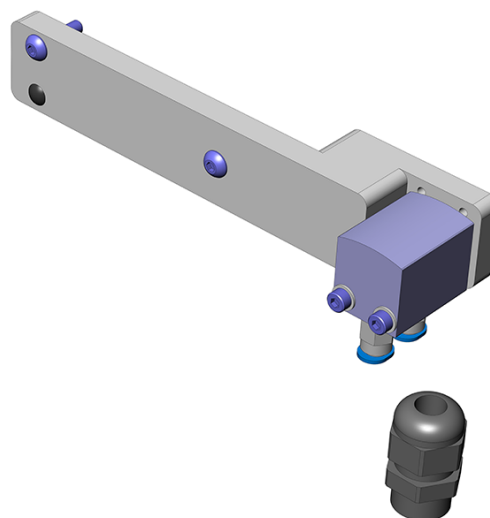

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Locking units
FB-MAxxxx

Pneumatic
Additional function
Unassembled
40 mm [1.57 in]
31 mm [1.22 in]
0.3 kg [.661 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes


Compatible with

Manual test fixtures (MA):
Accessories:

MA xxxx
ATE VAxxxx

Technical data

Stroke: 10 mm [.393 in]
Connection: QSM-M5-4
Installation: Thread M4
Compressed air connection:
Length: 147 mm [5.78 in]
Outer dimensionS (WxDxH): 40 x 147 x 31 mm [1.57 x 5.78 x 1.22 in]

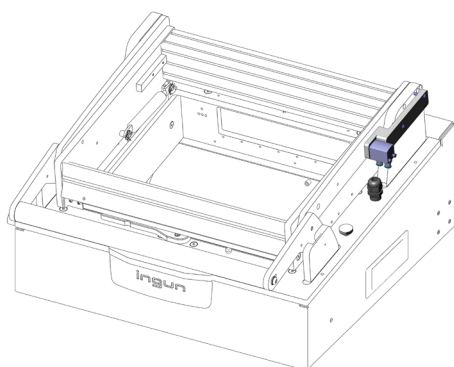

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



ingun.com

FUNCTIONAL UNIT