

Cable plug assembly, coaxial

SE-RG179-75MCXMG070

Item SE-RG179-0001




GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

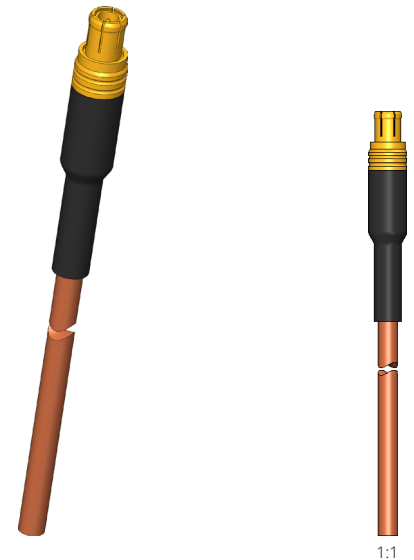

1:1

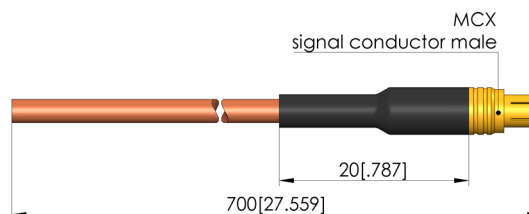

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-RG179
SE-RG179 plug
-65 °C [-85 °F]
165 °C [329 °F]
Yes

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength:
Attenuation coefficient a:
Attenuation coefficient b:

1 GHz
75 Ohm
Simple
115 W
115 RG179
.5 kV
0,73000 RG179
0,10140 RG179

Cable data

Cable length:
Cable type:
Kink protection cable:
Attenuation Fmax:

700 mm [27.5 in]

Shrink-on sleeve, black, 20 mm
.58 dB

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:

MCX
M signal conductor male / plug
Straight
Open cable end

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE