

Cable plug assembly, coaxial SE-RG316-50MCXMW150



Item SE-RG316-0015



ingun[®]

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)

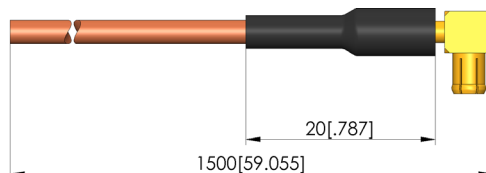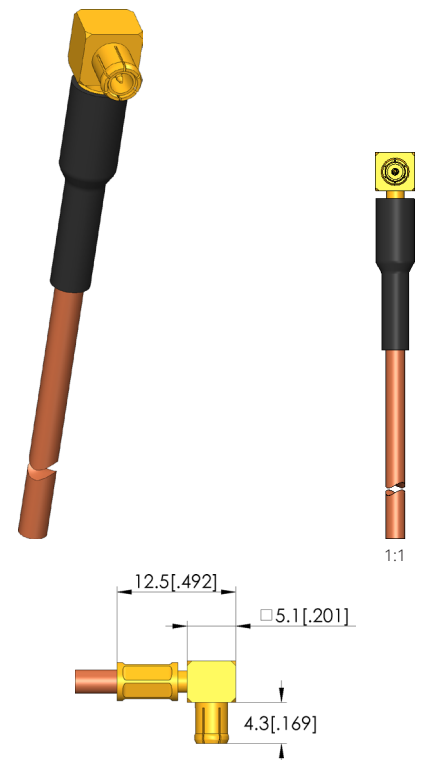

General data

Product group:

Series:

Sub-series:

Min. temperature:

Max. temperature:

RoHS-compliant:

Assemblies

SE-RG316

SE-RG316 plug

-55 °C [-67 °F]

155 °C [311 °F]

Yes

Electrical data

Maximum frequency:

Impedance:

Cable shielding:

Maximum performance:

Performance coefficient:

Dielectric strength:

Attenuation coefficient a:

Attenuation coefficient b:

3 GHz

50 Ohm

Simple

78 W

135 RG316

.75 kV

Cable data

Cable length:

Cable type:

Kink protection cable:

Attenuation Fmax:

1,500 mm [59 in]

Shrink-on sleeve, black, 20 mm

2.44 dB

Connector data

Interface 1:

Interface gender 1:

Version 1:

Interface 2:

MCX

M signal conductor male / plug

Right angle

Open cable end

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE