


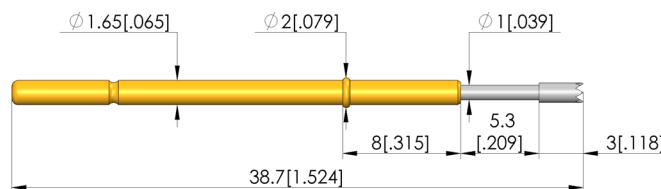




- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture:  
The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



### General data

Product group:  
 Sub-product group:  
 Series:  
 Grid:  
 Contacting from:  
 Magnetic:  
 Installation type:  
 Quick-exchange system:  
 Adjustable installation height:  
 Non-rotating:  
 Compatible receptacle(s):  
 Min. temperature:  
 Max. temperature:  
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)  
 Metric standard  
 GKS-112  
 2.54 mm [100 mil]  
 Post  
 Yes  
 Plug-in  
 Yes  
 No  
 No  
 KS-112  
 -40 °C [-40 °F]  
 80 °C [176 °F]  
 Yes

### Tip style data

Tip style:  
 Tip diameter:  
 Tip style surface:  
 Tip style material:

06 serrated  
 1.3 mm [.051 in]  
 R rhodium  
 3 CuBe

### Electrical data

Current load capacity / rated current:  
 Typical resistance (Ri):

5 A  
 20 mOhm

### Mechanical data

Total length:  
 Barrel diameter:  
 Maximum stroke:  
 Spring pre-load:  
 Collar height:  
 Spring force at working stroke:  
 Recommended working stroke:

38.7 mm [1.52 in]  
 1.66 mm [.065 in]  
 5.3 mm [.208 in]  
 0.27 N [.971 ozf]  
 08  
 0.8 N [2.87 ozf]  
 4 mm [.157 in]

# Test Probe

## GKS-112 306 130 R 0808

Item GKS-112-1882



**ingun**<sup>®</sup>

Partner for Future Technology



### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB

Learn more about  
ICT/FCT Test probes



[ingun.com](https://www.ingun.com)