

Interface

SST-SEICA

Item 109686



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- SEICA COMPACT-DIGITAL interface
- Reliable connection from test fixture to system interface
- Quick, easy installation on the bottom of the test fixture using a compatible interface

Application

Seica Compact-Digital interfaces are connection/transfer elements equipped with interface blocks to reliably transmit signals between test equipment and the test system. It is installed on the bottom of the test fixture using a suitable interface frame and equipped with INGUN contact terminals KT-158 02 (flat).

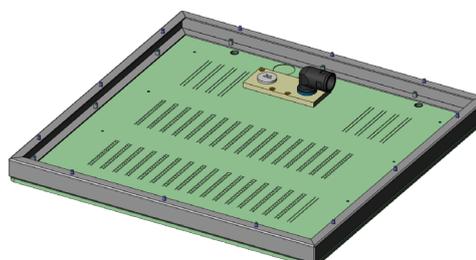

Delivery

The interface is unpopulated upon delivery. INGUN contact terminals KT-158 02 (flat) must be purchased separately.

General data

Product group:	Fixture interfaces
Series:	SST
Type:	SEICA
Version:	Compact Digital
Accessory type:	Additional function
Scope of delivery:	Unpopulated, max. 2048 KT-158 02
Max. interface signals:	1024
Width:	490 mm [19.2 in]
Height:	39 mm [1.53 in]
Weight:	6.2 kg [13.6 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xx13
Vacuum test fixtures (VA):	VA 4060
Accessories:	SSA-SEICA

Technical data

Length:	500 mm [19.6 in]
Outer dimensionS (WxDxH):	500 x 490 x 39 mm [19.6 x 19.2 x 1.53 in]

Interface supports

Part no.	Designation	Version
113444	SSA-SEICA-MAxx13	Suitable to manual test fixtures MA xx13
113445	SSA-SEICA-VA4060	Suitable to vacuum test fixtures VA 4060

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

