

# Receptacle KS-098 M2.5

Item KS-098M2.5




GO TO PRODUCT

**ingun**<sup>®</sup>


Partner for Future Technology

## Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

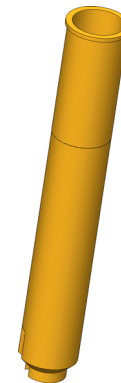

1:1

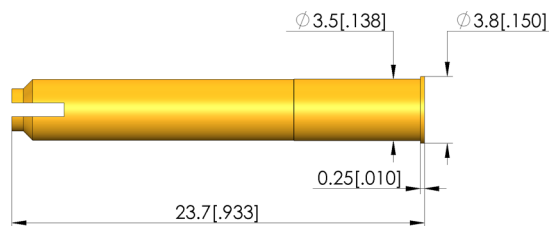

### General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-098  
KS-098 M screw-in version  
Solder outer surface  
No  
Gold  
3.8 mm [.149 in]  
0.25 mm [.009 in]  
No  
No  
Yes

### Mechanical data

Total length: 23.7 mm [.933 in]  
Outer diameter: 3.5 mm [.137 in]

### Mounting hole

Mounting hole in CEM1: 3.48 – 3.49 mm [.137 – .137 in]  
Mounting hole in FR4: 3.48 – 3.49 mm [.137 – .137 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 03/26\_GB

Learn more about  
Test probes

