




GO TO PRODUCT


- Robust polymer fibre optic cable for quick, simple plug fitting
- Available with outer diameter 2.3 mm or 1.0 mm
- Numerous mounting receptacles available from the ks range

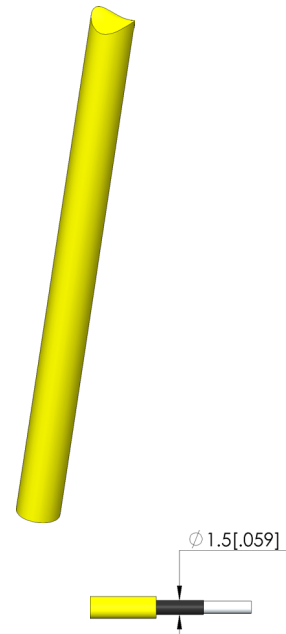

Ø 2.3 [.091]



Ø 1.5 [.059]



General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Material:
Colour:
Min. temperature:
Max. temperature:
RoHS-compliant:

Fibre optic cable
LL
Fibre optic cable
Single fibre (POF-K)
Customising accessories
Length upon request (by metre)
PA polyamide
Yellow
-40 °C [-40 °F]
85 °C [185 °F]
Yes

Compatible with

Interface blocks (SB):

SB-LL

Technical data

Min. bending radius:
Fibre optic cladding diameter:
Fibre optic core diameter:

30 mm [1.18 in]
2.3 mm [.09 in]
1.5 mm [.059 in]



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

