




DIRECTAMENTE AL PRODUCTO

- The Pylon interface for the top interchangeable kit WSO ASYS/ATH01/173,5 und WSO ASYS/ATH01/210,5 for individually configurable upgrade
- Reliable connection of top interchangeable kit (WSO) to system interface
- Quick, easy installation on the top interchangeable kit (WSO)

### Utilización

The interface (SST) is used as a connection/transfer mechanism to reliably transmit signals between the test fixture and the test system. It can be individually configured to the top ASYS/ATH01/173.5 and WSO ASYS/ATH01/210.5 interchangeable kits.

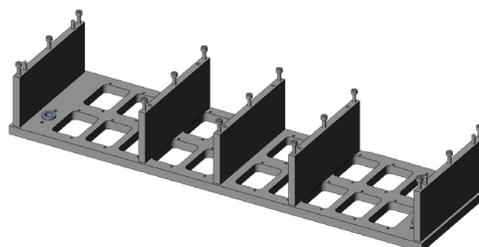

### Entrega

The Pylon interface is delivered unpopulated. It should be equipped with DUT-side interface blocks (SB-P-...).

### Datos generales


Grupo de productos:	Interfaces de adaptador
Serie:	SST
Tipo:	
Modelo:	Bloques de interfaz (SB)
Tipo de accesorios:	Función adicional
Estado de entrega:	Sin equipar, máx. 20 SB
Señales interfaces máx.:	3400
Ancho:	140 mm
Altura:	73,3 mm
Peso:	1,95 kg
Temperatura mín.:	10 °C
Temperatura máx.:	60 °C
Conforme RoHS:	Sí

### Compatible con

Juegos de recambio (WS): WS ASYS/ATH01/...

### Datos técnicos

Longitud: 496 mm  
Dimensiones exteriores (AnxPxAl): 496 x 140 x 73,3 mm

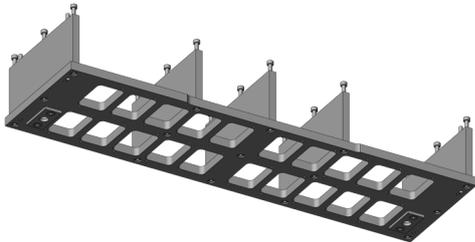**Interface blocks (excerpt)**

Part no.	Designation	Version
13515	SB-P-SI-170-4A-0,6	Signal block
16900	SB-P-HS-045-30A-1,0	High-current block
31002	SB-P-HF-016-0,7GHz	Radio-frequency block, 0,7 GHz
34571	SB-P-HF-016-4GHz-Z	Radio-frequency block, 4 GHz
42627	SB-P-HF-008-6GHz-Z	Radio-frequency block, 6 GHz
35532	SB-P-HF-004-18GHz	Radio-frequency block, 18 GHz
116155	SB-P-HSD-005	High-speed-digital block
29448	SB-P-LL-045-DM2,3	Optical wave block
37821	SB-P-PN-008-PK3-A	Pneumatic block
50581	SB-P-MB-20/4-30A/PK3-A	Mixed block, High-current/Pneumatic

**INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162  
 78467, Constance, Germany  
 Phone +49 7531 8105-0  
 Customer hotline +49 7531 8105-888  
 Fax +49 7531 8105-65  
 info@ingun.com

