

Receptacle

KS-215 M1.6-F-R

Item KS-215M1.6-F-R



GO TO PRODUCT


ingun[®]

Partner for Future Technology


Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

INGUN SELECTION



1:1

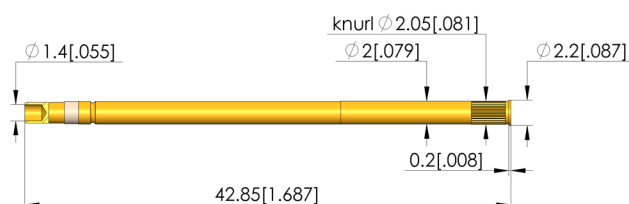

General data

Product group:	Receptacles (KS)
Series:	KS-215
Sub-series:	KS-215 M-F screw-in version Schnellwechselsystem
Type of receptacle connection:	Plug / open
Press ring:	No
Surface area:	Gold
Collar diameter:	2.2 mm [.086 in]
Collar height:	0.2 mm [.007 in]
Knurl:	Yes
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	Yes

Mechanical data

Total length:	42.9 mm [1.68 in]
Outer diameter:	2 mm [.078 in]

Mounting hole

Mounting hole in CEM1:	2 – 2.02 mm [.078 – .079 in]
Mounting hole in FR4:	2 – 2.02 mm [.078 – .079 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test probes



ingun.com

RECEPTACLES